



# ForceWare Graphics Drivers ***Release 70 Notes***

**Version 71.89**

**For Windows XP / 2000**

**Windows XP Media Center Edition**

**Windows 98 / ME**

**Windows NT 4.0**

**NVIDIA Corporation  
April 14, 2005**

Published by  
NVIDIA Corporation  
2701 San Tomas Expressway  
Santa Clara, CA 95050

## **Notice**

ALL NVIDIA DESIGN SPECIFICATIONS, REFERENCE BOARDS, FILES, DRAWINGS, DIAGNOSTICS, LISTS, AND OTHER DOCUMENTS (TOGETHER AND SEPARATELY, "MATERIALS") ARE BEING PROVIDED "AS IS." NVIDIA MAKES NO WARRANTIES, EXPRESSED, IMPLIED, STATUTORY, OR OTHERWISE WITH RESPECT TO THE MATERIALS, AND EXPRESSLY DISCLAIMS ALL IMPLIED WARRANTIES OF NON-INFRINGEMENT, MERCHANTABILITY, AND FITNESS FOR A PARTICULAR PURPOSE.

Information furnished is believed to be accurate and reliable. However, NVIDIA Corporation assumes no responsibility for the consequences of use of such information or for any infringement of patents or other rights of third parties that may result from its use. No license is granted by implication or otherwise under any patent or patent rights of NVIDIA Corporation. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. NVIDIA Corporation products are not authorized for use as critical components in life support devices or systems without express written approval of NVIDIA Corporation.

## **Trademarks**

NVIDIA, the NVIDIA logo, 3DFX, 3DFX INTERACTIVE, the 3dfx Logo, STB, STB Systems and Design, the STB Logo, the StarBox Logo, NVIDIA nForce, GeForce, NVIDIA Quadro, NVDVD, NVIDIA Personal Cinema, NVIDIA Soundstorm, Vanta, TNT2, TNT, RIVA, RIVA TNT, VOODOO, VOODOO GRAPHICS, WAVEBAY, Accuvie Antialiasing, the Audio & Nth Superscript Design Logo, CineFX, the Communications & Nth Superscript Design Logo, Detonator, Digital Vibrance Control, DualNet, FlowFX, ForceWare, GIGADUDE, Glide, GOFORCE, the Graphics & Nth Superscript Design Logo, Intellisample, M-BUFFER, nfiniteFX, NV, NVChess, nView, NVKeystone, NVOptimizer, NVPinball, NVRotate, NVSensor, NVSync, the Platform & Nth Superscript Design Logo, PowerMizer, Quincunx Antialiasing, Sceneshare, See What You've Been Missing, StreamThru, SuperStability, T-BUFFER, The Way It's Meant to be Played Logo, TwinBank, TwinView and the Video & Nth Superscript Design Logo are registered trademarks or trademarks of NVIDIA Corporation in the United States and/or other countries. Other company and product names may be trademarks or registered trademarks of the respective owners with which they are associated.

Intel, Indeo, and Pentium are registered trademarks of Intel Corporation. Microsoft, Windows, Windows NT, Direct3D, DirectDraw, and DirectX are trademarks or registered trademarks of Microsoft Corporation. OpenGL is a registered trademark of Silicon Graphics Inc. PCI Express, PCI-SIG, and the PCI-SIG design marks are registered trademarks and/or service marks of PCI-SIG.

Other company and product names may be trademarks or registered trademarks of the respective owners with which they are associated.

## **Copyright**

© 2005 by NVIDIA Corporation. All rights reserved.

# Table of Contents

## 1. Introduction to *Release 70 Notes*

Structure of the Document . . . . .	1
Changes in this Edition . . . . .	1

## 2. Release 70 Driver Issues

Issues Resolved in Version 71.89 . . . . .	4
Issues Resolved in Version 71.84 . . . . .	5
Open Issues in Version 71.89 . . . . .	6
NVIDIA Recommendations . . . . .	6
NVIDIA Issues . . . . .	7
Not NVIDIA Issues . . . . .	9
Known Product Limitations . . . . .	11
Slow Performance with World of Warcraft in SLI Mode . . . . .	12
DVD Playback Issues with Dual Quadro NVS Cards . . . . .	12
PowerDVD 5.0 Does Not Display Correctly in nView Span Mode . . . . .	12
DirectX Fails When Detaching/Reattaching Displays in Dualview Mode . . . . .	13
OpenGL Viewport Scaling Problem in Horizontal Span Mode . . . . .	13
Driver Reports 256 MB Memory on Quadro FX 330 Cards . . . . .	13
Video Playback in nView Clone and Span Modes . . . . .	14
Monitor Ordering in the Windows Settings Page 14	
DirectX Applications Run Only on Single Display Even in Multiview Mode . . . . .	16
Applying Workstation Application Profiles . . . . .	16
Advanced Timing Adjustment Limitations . . . . .	18
No Antialiasing of 3DMark03 Image Quality Screen Captures . . . . .	18
Medal of Honor Under Windows XP / Windows 2000 . . . . .	19
Hide Modes Check Box Cannot be Cleared . . . . .	19
Windows XP/2000 Issue with Settings Tab Monitor Positioning . . . . .	20
Gigabyte GA-6BX Motherboard . . . . .	20
Controlling Windows 9x TV Tuner Scaling Artifacts . . . . .	20
Quake III Arena malloc() Error on TNT2 . . . . .	21
Windows Media Player Hangs Playing MPEG Files . . . . .	21

AVI Playback Problems With Older Intel Indeo Codecs . . . . .	22
Antialiasing Problems With Certain Applications 22	
VIA KX133 and 694X Chipsets With AGP 2X Irongate Chipsets With AGP 1X . . . . .	22
Poor Quality S-Video Output on Some TVs . . . . .	23
GLQuake Crash and Version 5.16 (or Later) Drivers . . . . .	23
Windows 98 and Windows Me MultiMon Support 23	
AGP Programs May Hang With Athlon Processor . . . . .	24
Desktop Manager Does Not Re-Center Logon Screen . . . . .	24
Issues with Video Mirror . . . . .	24

## 3. The Release 70 Driver

Hardware and Software Support . . . . .	25
Supported Operating Systems . . . . .	25
Supported NVIDIA Products . . . . .	26
Supported Languages . . . . .	27
Driver Installation . . . . .	28
System Requirements . . . . .	28
Installation Instructions . . . . .	29

## 4. NVIDIA Driver History

Driver Release History . . . . .	34
Release 70 Enhancements . . . . .	34
Support for Newest GeForce 6 Series GPUs Additional SLI Support . . . . .	34
Improved Video Functionality . . . . .	35
Desktop Manager Wizard Improvements . . . . .	35
Control Panel Interface Improvements . . . . .	35
Release 65 Enhancements . . . . .	36
SLI Support . . . . .	36
512 MB Frame Buffer Support . . . . .	36
OS Support . . . . .	36
Enhancements in Driver Performance . . . . .	37
Desktop Manager and Control Panel Improvements . . . . .	37
Release 60 Enhancements . . . . .	38
Latest GPU Support . . . . .	38
PCI Express Support . . . . .	38
Enhancements in Driver Performance . . . . .	38

3D Graphics API Enhancements . . . . .	39
Release 55 Enhancements . . . . .	40
PCI Express Support . . . . .	40
PAE Support . . . . .	40
nView Desktop Manager Enhancements . . . . .	40
User Interface Enhancements . . . . .	40
Video Support Enhancements . . . . .	40
3D Graphics API Enhancements . . . . .	41
Release 50 Enhancements . . . . .	41
64-Bit Support . . . . .	41
Dynamic Memory Mapping . . . . .	41
NVIDIA Unified Compiler . . . . .	41
Display Driver Changes and New Features . . . . .	42
Video—New Features . . . . .	42
PowerMizer—New Features . . . . .	42
User Interface Changes . . . . .	43
nView . . . . .	43
DirectX Graphics . . . . .	44
OpenGL . . . . .	44
Release 40 Enhancements . . . . .	45
Enhanced Display Driver, DirectX, and Video Capabilities . . . . .	45
New Graphical User Interface . . . . .	46
Enhanced nView Desktop Manager Features . . . . .	46
OpenGL Enhancements . . . . .	47
Release 35 Enhancements . . . . .	47
Release 25 Enhancements . . . . .	48
Release 20 Enhancements . . . . .	49
Release 10 Enhancements . . . . .	49

## **A. Mode Support for Windows**

General Mode Support Information . . . . .	52
Default Modes Supported by GPU . . . . .	53
Understanding the Mode Format . . . . .	53
GeForce FX Family and GeForce 6 Series . . . . .	54
Quadro FX Family of High End GPUs . . . . .	61
GeForce and Quadro GPUs, GeForce2 and GeForce3 Series of GPUs . . . . .	68
GeForce2 MX, GeForce4 MX, Quadro4, and GeForce4 Ti Series GPUs, GeForce4 MX Integrated GPU . . . . .	71
GeForce2 Integrated GPU . . . . .	77
Quadro4 9xx / 7xx XGL Products . . . . .	80
Quadro FX Family and Quadro NVS Series GPUs . . . . .	86
TNT2 and Vanta Products . . . . .	92
Modes Supported by DACs and TV Encoders . . . . .	94
External DAC Mode Support . . . . .	94
TV-Out Mode Support . . . . .	95



# List of Tables



<b>Table 2.1</b>	Workstation Application Profile Issues . . . . .	17
<b>Table 2.1</b>	Known Issues with Video Mirror . . . . .	24
<b>Table 3.1</b>	Supported NVIDIA GPU-Based Products. . . . .	26
<b>Table 3.2</b>	Hard Disk Space Requirements—English . . . . .	28
<b>Table 3.3</b>	Hard Disk Space Requirements—Non-English Languages . . . . .	28
<b>Table 3.4</b>	Hard Disk Space Requirements—Full International Package . . . . .	28
<b>Table 3.5</b>	Additional Operating System Requirements . . . . .	29
<b>Table 4.1</b>	NVIDIA Drivers for Windows . . . . .	34
<b>Table A.1</b>	Modes Supported for High Resolution Displays . . . . .	52
<b>Table A.2</b>	Non-standard Modes Supported . . . . .	52
<b>Table A.3</b>	External DAC Modes (Fairchild FMS3815). . . . .	94
<b>Table A.4</b>	External DAC Modes (Analog Devices ADV-7123). . . . .	94
<b>Table A.5</b>	Mode Support for S-Video and Composite Out . . . . .	95
<b>Table A.6</b>	Mode Support for Component YPrPb Out and DVI Out . . . . .	95



## CHAPTER

## 1

# INTRODUCTION TO *RELEASE 70 NOTES*

This edition of *Release 70 Notes* describes the Release 70 Drivers for Microsoft® Windows® and provides information applicable to all NVIDIA® drivers. NVIDIA provides these notes to describe performance improvements and bug fixes in each documented version of the driver.

## Structure of the Document

---

This document is organized in the following sections:

- “[Release 70 Driver Issues](#)” on page 3 gives a summary of
  - Issues that have been resolved in this version.
  - Issues that are open in this version
  - Known limitations of the driver
- “[The Release 70 Driver](#)” on page 25 describes the NVIDIA products and languages supported by this driver, the system requirements, and how to install the driver.
- “[NVIDIA Driver History](#)” on page 33 describes the new features included in the Release 70 driver as well as information on previous driver releases.
- “[Mode Support for Windows](#)” on page 51

## Changes in this Edition

---

This edition of *Release 70 Notes* includes information about version 71.89 of the Release 70 driver. It discusses changes made to the driver since version 67.66. These changes are discussed beginning with the chapter “[Release 70 Driver Issues](#)” on page 3.





## CHAPTER

## 2

## RELEASE 70 DRIVER ISSUES

This chapter describes open issues for version 71.89, and resolved issues and driver enhancements for versions of the Release 70 driver up to version 71.89. The chapter contains these sections:

- “Issues Resolved in Version 71.89” on page 4
- “Issues Resolved in Version 71.84” on page 5
- “Open Issues in Version 71.89” on page 6
- “Known Product Limitations” on page 11

## Issues Resolved in Version 71.89

---

The following are changes made and issues resolved since driver version 71.84:

- GeForce 6600GT / 6800 Ultra, SLI, Windows XP: Overclocking using Coolbits does not work when SLI mode is enabled.
- GeForce 6600 GT / 6800 LE / 6800 / 6800GT / 6800 Ultra, SLI: After exiting a 3D game, the NVIDIA clock frequency remains at the higher 3D-performance frequency instead of reducing to the standard clock frequency.
- GeForce 6800 Ultra: The 'Temperature Settings' in the Display Properties while idling reports an approximately 20% higher temperature than with the previous driver version.
- GeForce 6600 GT, Windows XP: The game Lock On—Modern Air Combat crashes when played at the highest graphics settings.
- Dual GeForce 6800 Ultra, SLI: System fails to resume from S4 Hibernate on ASUS A8N-SLI.
- GeForce 6600 GT, SLI, Windows XP: Corruption appears on the course in Tiger Woods 2005 with SLI mode enabled.
- GeForce 6800 Ultra, SLI, Windows XP: Running the game Chronicles of Riddick with SLI enabled results in corruption or application crash.
- GeForce 6600 GT / 6800 LE / 6800 / 6800GT / 6800 Ultra, SLI: System fails to resume from Standby/Hibernate with OpenGL running in SLI mode.
- GeForce 6600 GT / 6800 LE / 6800 / 6800GT / 6800 Ultra, SLI: System hangs at the end of the driver installation while initializing the second display (DVI) on ASUS A8N-SLI motherboard.

## Issues Resolved in Version 71.84

---

The following are changes made and issues resolved since driver version 67.66:

- Flat panel native resolution 1680x1050 is not displayed correctly.  
*1680x1050 and 1366x768 resolutions for flat panels are now supported.*
- GeForce 6 Series: Skills menu and hotkey bar are corrupt in the game World of Warcraft.
- GeForce 6 Series: When performing 4:3 PanScan of VMR7 or VMR9 DVD playback, the screen does not pan nor is the screen centered.
- SLI Cards: The game Lock On Modern Air Combat has rendering issues with SLI mode enabled.
- GeForce4 Ti/GeForce 6800: Command and Conquer: Generals has corruption when both antialiasing is enabled in the NVIDIA control panel and in-game image quality is set to "High".
- GeForce 6800: Code Creatures Benchmark shows screen corruption at 1600x1200x32 with 8x antialiasing enabled.
- GeForce 6 Series, SLI: The opening cinematics in the game Ground Control 2 are corrupted.
- GeForce 6600: Minor flickering in Return of Wolfenstein: Enemy Territory when antialiasing is enabled at high resolutions.
- GeForce 6800: NHL 2005 has screen corruption when antialiasing is enabled at 1600x1200 resolution.
- GeForce 6 Series: Water in Half-Life 2 has vertical banding.
- GeForce 6800: The screen flashes when playing the game Tron 2.0 with 3D stereo enabled.
- When playing Star Wars Republic Commando:
  - There might be graphical corruption or tearing when clicking Apply after adjusting options in the Graphics Options menu.
  - The computer may reboot during the prologue.
  - The game may crash to the desktop while playing the game, or when quitting from the in-game pause menu when Squad Shadows are enabled in the Graphics Options menu.

## Open Issues in Version 71.89

---

As with every released driver, version 71.89 of the Release 70 driver has open issues and enhancement requests associated with it. This section includes lists of issues that are either not fixed or not implemented in this version. Some problems listed may not have been thoroughly investigated and, in fact, may not be NVIDIA issues. Others will have workaround solutions.

They are listed in the following sections:

- “NVIDIA Recommendations” on page 6
- “NVIDIA Issues” on page 7
- “Not NVIDIA Issues” on page 9

### NVIDIA Recommendations

---

- The GeForce 6800 Ultra 512MB works in single card mode with Apple 30 inch HD Cinema panel. However, an issue has been discovered when running the GeForce 6800 Ultra 512MB card in SLI mode with an Apple 30 inch HD Cinema display. This is due to an interaction between the GPU, the application, and the ability to scale to nonnative panel resolutions of the Apple display.

All GeForce 6 series GPUs will work with Apple 23 and 20 inch HD Cinema displays in single GPU mode.

*NVIDIA recommends using the GeForce 6800 Ultra 512MB with the Apple 30 inch HD Cinema Display line only in non-SLI modes.*

- Single display modes such as TV only, DFP/LCD only or CRT only provide the best performance and quality from Windows Media Center Edition.

*Dual display modes such Dualview and nView Clone and Span modes are not recommended.*

- When using the trial version of WinDVD 6 from InterVideo.com, you may experience TV or DVD playback problems in Windows Media Center if you change resolutions during video playback. This is most often seen when switching from windowed to full screen mode.

*This problem does not occur with the latest full OEM versions of WinDVD or with other Windows Media Center qualified DVD decoders.*

- If you perform a clean driver installation (no previous NVIDIA drivers installed), **you must reboot your computer.** If you do not

reboot, the predefined application profiles will not be activated and you may experience application stability problems.

- Windows XP/2000: Clone mode may be set for the GeForce FX 5600 although only one display is connected.

*This setting causes a drop in the performance of 3D applications. The workaround is to use the NVIDIA control panel to reset the system to standard mode from Clone mode.*

## **NVIDIA Issues**

---

- GeForce FX 5200 Ultra, Windows Media Center Edition 2005, NVTV: : Live TV hangs when running in DualView mode with Video Mirror enabled.
- GeForce FX 5900 Ultra, Windows Media Center Edition 2005, NVTV: Live TV hangs the system when run in full screen mode.
- GeForce 6200 with TurboCache, Windows Media Center 2005: When starting to record, then closing Media Center, then reopening to recording in progress, a blue-screen crash occurs.
- GeForce 6200 with TurboCache, Windows Media Center 2005: When switching DVD playback to full-screen mode, the screen turns blank then the desktop corrupts when returning to windowed mode.
- GeForce 6800 Ultra, SLI: Apple 30 inch display does not run with 512 MB graphics boards in SLI mode. You must switch to single GPU mode to work.
- GeForce 6800 Ultra, Windows XP: The wave splash particle effect in the game Silent Hunter 3 does not render correctly.
- GeForce 6800 Ultra, Windows XP: The opening videos are corrupted in the game Silent Hunter 3.
- GeForce 6600 GT, Windows XP, SLI: Textures flicker in the game Everquest II when SLI mode is enabled.
- GeForce 6200 with TurboCache, Windows XP: The left side of Half Life 2 is blacked out when 2x or 4x antialiasing is enabled.
- Dual GeForce 6600 GT, SLI, Windows XP: There is texture corruption in the game Toca Race Driver 2 when played at 1600x1200 resolution, with 4x antialiasing and SLI mode enabled.

- GeForce 6600 GT, SLI, Windows XP: Frame skipping occurs in the game PainKiller with SLI mode enabled.
- GeForce 6600 GT, SLI, Windows XP: There is texture corruption in the ammo interface in the game Painkiller.
- GeForce 6800 Ultra: Stuttering occurs in the game World of Warcraft.
- GeForce 6200 with TurboCache (supporting 128MB, including 16MB on board memory): The system crashes when resizing applications.
- GeForce 6 Series, SLI, Windows XP: Light sources show through solid objects in the game Halo with SLI mode enabled.
- GeForce 6800/6600/6200, SLI, Windows XP: Intro videos do not render in Tiger Woods 2005 with SLI mode enabled.
- GeForce 6800: White flashing appears across the screen in the game Joint Operations—Typhoon Rising.
- GeForce FX 5200: There is corruption on the water in the 3DMark05 Canyon Flight Game test.
- GeForce 6200: There is screen corruption when antialiasing is enabled within 3DMark05.
- GeForce FX 5200: There is corruption in the Far Cry heads up displays.
- GeForce 6600 (128 MB): The game Hitman—Contracts refuses to start with graphics options set to the maximum (1600x1200, 4x antialiasing, 16x anisotropic filtering).
- GeForce 6600, SLI: Screen goes black momentarily during Tomb Raider—Angel of Darkness with SLI mode enabled.
- GeForce FX 5950: The game Ultra Battle for Middle-earth crashes to the desktop with a Direct3D error
- GeForce 6800: Shadow corruption occurs in the game Lineage II (Lineage2).
- GeForce 6 Series: Stuttering occurs in different portions of the game EverQuest2.

- GeForce 6200 with TurboCache (supporting 128MB, including 16MB on board memory), Windows XP Media Center Edition 2005: Full-screen video mirroring is not supported.
- GeForce FX 5959: Ultra Age of Mythology has screen flicker with certain special effects.
- GeForce FX 5959: Ultra Medal of Honor Pacific Assault has flickering with 8x anisotropic filtering enabled.

## **Not NVIDIA Issues**

---

- Slow performance with World of Warcraft.  
*This is not an NVIDIA bug. See “Slow Performance with World of Warcraft in SLI Mode” on page 12 for a full explanation and workaround.*
- GeForce 6 Series, Windows XP: Lighting issue with Half-Life 2.  
*This is not an NVIDIA bug, but rather an issue with the application.*
- GeForce 6200 with TurboCache (supporting 128MB, including 16MB on board memory): A Direct3D out-of-memory error occurs in Unreal Tournament 2003 when using the HardOCP Benchmark Utility ver 2.1.  
*This is not an NVIDIA bug.*
- Geforce 6800: Half-Life 2 fog is different when using ATI hardware.  
*This is not an NVIDIA bug, but rather an issue with the application.*
- GeForce 6600: Artifacts appear in the intro videos and during game play in Tomb Raider: Angel of Darkness at 1600x1200 and with 4x antialiasing enabled.  
*This is not an NVIDIA bug.*
- GeForce 6800: Aspect ratio is incorrect when movie transitions from 4:3 to 16:9 playback using PowerDVD5 Trail (download from the Cyberlink Web site).  
*This is an application issue. The problem does not occur with other DVD players.*
- GeForce 6600/6800 (128MB): 3D Mark 2003 demo mode results in an out of memory error at 1600x1200x32 with 4x antialiasing enabled.

*This is not a bug. The problem occurs because there is not enough memory to run 3D Mark03 in this mode with a 128MB board.*

- Windows XP, GeForce FX 5950 Ultra: Homeworld2 antialiased performance is slow.

*This is not an NVIDIA bug, but is a known issue with the application. A game patch 1.1 is available at [ftp://ftp.sierra.com/pub/sierra/homeworld2/updates/homeworld2\\_update\\_en\\_10\\_11.exe](ftp://ftp.sierra.com/pub/sierra/homeworld2/updates/homeworld2_update_en_10_11.exe).*

- GeForce2, GeForce4 MX, Windows XP: City of Heroes crashes to the desktop intermittently.

*This is not an NVIDIA bug.*

- Windows ME: CodeCult benchmark does not run properly.

*This is not an NVIDIA bug.*

- GeForce FX, Windows ME: Gunmetal Demo intro movie does not display properly.

*This is not an NVIDIA bug.*



## Known Product Limitations

---

This section describes problems that will not be fixed. Usually, the source of the problem is beyond the control of NVIDIA. Following is the list of problems and where they are discussed in this document:

- “Slow Performance with World of Warcraft in SLI Mode” on page 12
- “DVD Playback Issues with Dual Quadro NVS Cards” on page 12
- “PowerDVD 5.0 Does Not Display Correctly in nView Span Mode” on page 12
- “DirectX Fails When Detaching/Reattaching Displays in Dualview Mode” on page 13
- “OpenGL Viewport Scaling Problem in Horizontal Span Mode” on page 13
- “Driver Reports 256 MB Memory on Quadro FX 330 Cards” on page 13
- “Video Playback in nView Clone and Span Modes” on page 14
- “Monitor Ordering in the Windows Settings Page” on page 14
- “DirectX Applications Run Only on Single Display Even in Multiview Mode” on page 16
- “Applying Workstation Application Profiles” on page 16
- “Advanced Timing Adjustment Limitations” on page 18
- “No Antialiasing of 3DMark03 Image Quality Screen Captures” on page 18
- “Medal of Honor Under Windows XP / Windows 2000” on page 19
- “Hide Modes Check Box Cannot be Cleared” on page 19
- “Windows XP/2000 Issue with Settings Tab Monitor Positioning” on page 20
- “Gigabyte GA-6BX Motherboard” on page 20
- “Controlling Windows 9x TV Tuner Scaling Artifacts” on page 20
- “Quake III Arena malloc() Error on TNT2” on page 21
- “Windows Media Player Hangs Playing MPEG Files” on page 21
- “AVI Playback Problems With Older Intel Indeo Codecs” on page 22
- “Antialiasing Problems With Certain Applications” on page 22
- “VIA KX133 and 694X Chipsets With AGP 2X” on page 22

- “Irongate Chipsets With AGP 1X” on page 22
- “Poor Quality S-Video Output on Some TVs” on page 23
- “GLQuake Crash and Version 5.16 (or Later) Drivers” on page 23
- “Windows 98 and Windows Me MultiMon Support” on page 23
- “AGP Programs May Hang With Athlon Processor” on page 24
- “Desktop Manager Does Not Re-Center Logon Screen” on page 24
- “Issues with Video Mirror” on page 24

## **Slow Performance with World of Warcraft in SLI Mode**

This is not an NVIDIA bug, but instead the result of a recent patch for World of Warcraft to reduce mouse lag on slower computers by synchronizing the GPU(s).

*This change is unnecessary for NVIDIA users, and particularly for users with SLI configurations.*

For optimal performance when playing World of Warcraft in SLI mode:

- Add the "-nofixlag" command-line option to your World of Warcraft shortcut, and
- Disable 'vertical sync' within the World of Warcraft in-game video options.

## **DVD Playback Issues with Dual Quadro NVS Cards**

With both AGP and PCI Quadro NVS cards installed in the system, when attempting to play DVDs in full-screen mode on the display connected to the PCI card, the screen is blank.

*This is not an NVIDIA bug, but rather a problem with older point releases of PowerDVD and WinDVD.*

## **PowerDVD 5.0 Does Not Display Correctly in nView Span Mode**

With nView Horizontal Span mode enabled, when the PowerDVD 5.0 playback window is dragged to the second display and then stretched to fill the display, the right area of the display is corrupted.

*This is not an NVIDIA bug, but a problem with PowerDVD.*

## DirectX Fails When Detaching/Reattaching Displays in Dualview Mode

---

This problem can be duplicated as follows:

- 1 Enable both displays in Dualview mode.
- 2 Detach monitor 2 and apply settings.
- 3 Reattach monitor 2 and apply settings.  
DirectX runtime fails on monitor 1.

*This is not an NVIDIA bug, but a limitation in the operating system where DirectX does not enumerate the second device. DirectX can be restored to both displays by rebooting the system*

## OpenGL Viewport Scaling Problem in Horizontal Span Mode

---

With nView Horizontal Span mode enabled, when opening an OpenGL model in a viewport, the model image is scaled too large to fit in the viewport. The problem occurs with such applications as Maya 5.0 and 3D Studio MAX 4.26.

*This is not an NVIDIA bug, but a limitation in the application's ability to properly maintain the aspect ratio in Horizontal Span mode.*

## Driver Reports 256 MB Memory on Quadro FX 330 Cards

---

- **Problem**

When a 64 MB Quadro FX 330 card is installed, the driver reports that the card needs 256 MB, causing 256 MB of address space to be consumed.

- **Explanation**

*This is not a bug but a product limitation.*

The Quadro FX 330 GPU has some limitations that prevent the card from addressing less than 256 MB of system memory.

## Video Playback in nView Clone and Span Modes

---

- **Problem**

With nView Clone or Span mode enabled, video playback appears on only one display under the following conditions:

- Under nView Clone mode, when fullscreen video mirror is not used.
- Under nView Span mode, when fullscreen video mirror is not used and the video is positioned to span across both monitors.

- **Explanation**

With applications that render using the hardware overlay—such as DirectX applications—the default driver behavior for Release 60 is to enable the hardware overlay when nView Clone or Span mode is enabled.

*Because the driver supports only one hardware overlay, the video appears on only one display.*

## Monitor Ordering in the Windows Settings Page

---

### Monitor Ordering on a Single GPU

- **Issue**

The monitor order in the Display Properties Settings page is not consistently matched with the connectors on the graphics card.

- **Explanation**

The driver does not distinguish connector positions, but instead distinguishes the display type, and consequently assigns monitor numbers according to the display type and not according to the connector.

## Monitor Ordering on a Multiple GPU System

- **Issue**

When four monitors are connected to a system with multiple PCI GPUs, such as a Quadro NVS 400 graphics card, and enabled in Dualview or Multiview mode, many customers expect the monitor ordering in the Display Properties Settings page to conform to the following:

Connector Position	Monitor Number
Primary GPU—Output 1	1
Primary GPU—Output 2	2
Secondary GPU—Output 1	3
Secondary GPU—Output 2	4

The monitor ordering, in fact, does not conform to this scheme.

- **Explanation**

The monitor ordering is not controlled by the driver, but rather by the Windows OS method of enumerating PCI devices. The Windows enumeration results in the following monitor numbering:

Connector Position	Monitor Number
Primary GPU—Output 1	1
Secondary GPU—Output 1	2
Primary GPU—Output 2	3
Secondary GPU—Output 2	4

**Considerations for nView Span Modes:** Outputs from the same GPUs are grouped together in nView Span modes, resulting in the desktop spanning across monitors 1 and 3, or across 2 and 4.

## DirectX Applications Run Only on Single Display Even in Multiview Mode

---

- **Problem**

When running DirectX applications in fullscreen mode on an NVIDIA Multiview system, the application appears on only one display instead of all the displays.

A Multiview system consists of a Quadro NVS series graphics card with multiple monitors connected and multiview mode enabled.

- **Explanation**

The problem occurs only with DirectX /Direct3D applications that use full-screen exclusive mode. In order to support these applications, the driver must switch to single display mode and blank out the other displays.

In scenarios that require multiview functionality—such as when using screen savers—NVIDIA recommends using non-DirectX/Direct3D applications.

## Applying Workstation Application Profiles

---

- **Background**

The workstation application profiles are software settings used by the NVIDIA Display Drivers to provide optimum performance when using a selected application. The profile also works around known application issues and bugs.

If there is an available setting for an application, it should be used, otherwise incorrect behavior or reduced performance is likely to occur.

- **Issues**

Application profile changes are subject to the following conditions:

- **Configuration Changes Require Application Restart**

Running applications do not receive notification of configuration changes, Therefore, if you change the configuration while the application is running, you must exit and restart the application for the configuration changes to take effect.

- **Some Profiles Release DirectDraw**

Some profiles release DirectDraw. If you change the configuration while the application is running, the application will not continue to run. You must exit and restart the application. See the table below for a list of application profiles that release DirectDraw.

- **Some Profiles Require System Reboot**

See the table below for a list of application profiles that require system reboot for the configuration changes to take effect.

**Table 2.1** Workstation Application Profile Issues

<b>Application Profile Name</b>	<b>Releases Direct Draw</b>	<b>Requires a Reboot to take effect</b>
Ansys	X	
Cadcentre PDMS	X	
CATIA	X	
CDRS	X	
ESPRi	X	
Exceed	X	
I-DEAS Master Series	X	
ICEM Surf	X	
IronCAD	X	
Large Model CAD	X	X
Microstation	X	
NADAMS	X	
NASTRAN, Patran	X	
OneSpace Designer	X	
OneSpace Designer-Large Model	X	X
Plant Designer, Imagineer	X	
Pro/ENGINEER	X	
Pro/ENGINEER Wildfire	X	
PTC DIVISION Mockup	X	
OneSpace Designer Modeling	X	
Solid Edge	X	
Solidworks	X	
ThinkDesign	X	
TOGO POST	X	
Unigraphics	X	

## Advanced Timing Adjustment Limitations

---

- **Problem**

The Advanced Timing page—accessed from the NVIDIA Display Properties Change Resolution page—is not available for some cards using the DVI connector.

- **Explanation**

DVI timing adjustment is supported for NV3x-based cards only if they have an external TMDS, such as the SiliconImage 164.

If the card uses the internal TMDS, then the page is not accessible. However, cards with an internal TMDS can support refresh rates less than 60 Hz in this driver.

## No Antialiasing of 3DMark03 Image Quality Screen Captures

---

- **Problem**

After enabling antialiasing from the NVIDIA Properties page, 3DMark03 screen captures—obtained using the application’s screen capture function—might not be antialiased.

- **Explanation**

This is not an NVIDIA bug, but rather a result of different methods used to render antialiased images.

Depending on a combination of factors, the driver may take advantage of the NVIDIA hardware’s ability to bypass the front buffer while rendering an antialiased image. In this case, the front buffer does not contain antialiased data, so if an application takes data from the front buffer—as is the case with 3DMark03’s Image Quality screen captures—then the resulting image is not antialiased.

To accommodate applications that request use of the front buffer, the NVIDIA software can provide the antialiased data in a buffer to the application. Since this negates the advantages of the NVIDIA hardware capability, this support is enabled only when antialiasing is enabled within the application, and not from the NVIDIA control panel.

*In all cases when antialiasing is enabled, screen images as well as screen captures obtained using the Print Screen key are always antialiased.*



## Medal of Honor Under Windows XP / Windows 2000

---

- **Problem**

The Electronic Arts game Medal of Honor uses a hard coded buffer to parse the OpenGL extension string. This can cause a system crash under Windows XP and Windows 2000.

- **Workaround**

NVIDIA has implemented Medal of Honor application detection to work around this extension string crash.

## Hide Modes Check Box Cannot be Cleared

---

- **Background**

One of the NVIDIA display property page dialog boxes contains the check box labelled "Hide modes that this monitor cannot display". It is checked by default, indicating that only the refresh rates supported by the monitor are listed in the refresh rate drop down list.

The check box appears in the Device Adjustments->Monitor Settings page.

- **Problem**

If you clear the check box, click **Apply**, and then close the dialog box, the check box is still checked when the page is re-opened.

- **Explanation**

This function is no longer controlled by the NVIDIA driver, but has not been removed from the control panel in order to maintain consistency with driver designs that are currently being shipped to OEMs.

## Windows XP/2000 Issue with Settings Tab Monitor Positioning

---

- **Problem**

In the Windows **Display Properties** > **Settings** tab, the secondary monitors cannot be positioned directly above monitor #1 without snapping horizontally to a position diagonal to monitor #1.

- **When the Problem Occurs**

The problem occurs when four monitors are connected to the graphics adapter card, but only two of them are enabled.

- **Cause and Workaround**

This is a Microsoft—not an NVIDIA—bug, and there is no workaround to correct the positioning of the monitor icons. However, the actual positioning of the displays on the desktop can be corrected using the nView Desktop Manager window as follows:

- 1 Under the Tools tab in the Desktop Manager windows, make sure Automatically Align Displays is checked.
- 2 In the Settings tab, position the appropriate monitor icon above monitor #1, then click **Apply**.

The mouse cursor movement between monitor desktops will correspond to a vertical orientation of the monitors, even though the monitor icons in the Settings tab are diagonal to each other.

**Note:** This will be the case even if the monitor icons are deliberately positioned diagonal to each other.

## Gigabyte GA-6BX Motherboard

---

This motherboard uses a Linfinity regulator on the 3.3-V rail that is rated to only 5 A—less than the AGP specification, which requires 6 A. When diagnostics or applications are running, the temperature of the regulator rises, causing the voltage to the NVIDIA chip to drop as low as 2.2 V. Under these circumstances, the regulator cannot supply the current on the 3.3-V rail that the NVIDIA chip requires.

This problem does not occur when the graphics board has a switching regulator or when an external power supply is connected to the 3.3-V rail.

## Controlling Windows 9x TV Tuner Scaling Artifacts

---

Bus-mastering TV tuners that do not flip leave artifacts when they are scaled. On Windows 9x, this problem is addressed by setting the local DirectDraw™ registry value `VideoBusMasterMode` to 1. This setting causes the DirectDraw driver to look for flips occurring within half-second intervals. If none are found, an overlay automatically starts flipping at 30 fps. This setting works with only Windows 9x.

## Quake III Arena malloc() Error on TNT2

---

- **Problem**

Running the application Quake III Arena in a continuous loop results in an application failure after several hours.

Typical failure modes include either a `malloc()` error (such as `Z_malloc: failed on allocation of xxxxxxxx bytes`) or the Microsoft error dialog stating that “the application has experienced a problem and must now be closed”.

- **Explanation**

The problem is not an NVIDIA bug, but is caused by a memory leak in Quake III Arena. The extent of the problem depends on the method used for looping the application:

- **Using a .CFG File**

Using a `.cfg` file actually performs an infinite recursion, which causes a memory leak in Quake III Arena, leading to the failure.

- **Running Quake III as a Local Server**

Another method for using Quake III Arena as an OpenGL stress test is to run Quake III as a local server and then either follow or spectate a bot server. The failure can also occur using this method, depending on the Quake III Arena version. For example, the problem has been seen with point release 1.15c but not with point release 1.17.

## Windows Media Player Hangs Playing MPEG Files

---

On systems using the InterVideo WinDVD player (including ones that don't contain NVIDIA components), Windows Media Player 6.4 halts if the slider is adjusted while an MPEG clip is playing. The problem also occurs if Active Movie or the Movie Player on the Windows 98 CD is used instead of Media Player 6.4.

There are two ways to work around this problem:

- **Under Display Properties > Settings > Advanced... > Performance, set Graphics Hardware acceleration to None.**
- **Uninstall the WinDVD player.**

This is not an NVIDIA bug.

## AVI Playback Problems With Older Intel Indeo Codecs

---

Some Intel Indeo® video codecs prior to 5.x (notably 3.2) do not correctly play AVI files that contain IF09 (YUV9) data. Symptoms include distorted images and the failure of the Overlay Color Control function. These codecs come installed on many Windows 9x and Windows NT 4.0 systems.

The problem can be resolved by downloading a release 5.x or later Indeo codec from the Intel Web site.

## Antialiasing Problems With Certain Applications

---

Antialiasing in the NVIDIA Direct3D driver requires each new frame to be rendered from scratch. This requirement adversely affects applications that render only that portion of the content that has changed since the last frame. A common symptom of this problem is geometric structures that incorrectly disappear and re-appear as the scene shifts.

## VIA KX133 and 694X Chipsets With AGP 2X

---

On Athlon motherboards with the VIA KX133 or 694X chipset, such the ASUS K7V motherboard, NVIDIA drivers default to AGP 2X mode to work around insufficient drive strength on one of the signals.

- **On Windows 9x systems, the registry key**

```
HKEY_LOCAL_MACHINE\Software\NVIDIA Corporation\Global\System\
EnableVia4X
```

can be created to force NVIDIA drivers to use AGP 4X transfers.

- **On Windows NT 4.0 and Windows 2000 systems, the registry key is**

```
HKLM\System\CurrentControlSet\Services\nv4\DeviceN\ EnableVia4X
```

where the N in DeviceN is the system-determined number indicating the current NVIDIA device. This number is normally 0.

These registry keys should only be used if there is reason to believe that the motherboard has the appropriate drive strength.

## Irongate Chipsets With AGP 1X

---

AGP 1X transfers are used on Athlon motherboards with the Irongate chipset to work around a problem with the signal integrity of the chipset.

## Poor Quality S-Video Output on Some TVs

---

NVIDIA drivers differentiate an S-video TV from a composite TV by searching for 75-Ohm loads on the chrominance and luminance lines. If the driver detects only one such load, it assumes that it has a composite TV and drives both chroma and luma onto that line. This approach allows both types of TV to display in color.

Unfortunately, some S-video TVs do not apply the correct load to both lines, causing the driver to detect an S-video TV as a composite. The driver, in turn, sends the lower quality signal to the S-video TV. To work around this problem, use the Control Panel to override the “Auto-select” feature. This can be done following these steps:

- 1 In the Settings tab of the Display Properties Control Panel, click Advanced.
- 2 In the nView tab, click Device Settings and click Select Output Device.
- 3 In the Device Selection tab, click the TV option.
- 4 Change the “Video output format” to S-video.

## GLQuake Crash and Version 5.16 (or Later) Drivers

---

GLQUAKE.EXE crashes when it is run with the `-condebug` command-line option on a GeForce 256 or a GeForce2 GTS that uses NVIDIA driver version 5.16 or later.

GLQuake uses `glGetString(GL_EXTENSIONS)` to find the NVIDIA OpenGL extensions string and tries to dump the result into a fixed-length, 1024-byte buffer. With the advent of NVIDIA driver version 5.16 and its additional OpenGL capabilities, the extensions string now exceeds 1024 bytes. GLQuake does not truncate the OpenGL extensions string to the length of the buffer, thereby writing past the end of the buffer. The data lost in this process eventually causes the application to crash.

## Windows 98 and Windows Me MultiMon Support

---

When running in MultiMon configuration, the Windows 98 and Windows Me operating systems force resolutions to be multiples of eight; for example, a resolution of 1600x900 pixels is changed to 1600x896.

Prior to setting a mode on the secondary display under MultiMon, these operating systems first validate the mode on the primary display and change the resolution of the primary display to 1600x896. Because the 1600x896 resolution is not in the NVIDIA master mode list, the NVIDIA driver would normally reject this resolution, which would prevent the operating systems from validating it and would prevent them from setting the secondary display's mode.

To work around this problem, the driver silently accepts the 1600x896 resolution, allowing this resolution to be validated by the operating systems in MultiMon configuration.

## AGP Programs May Hang With Athlon Processor

Windows 2000 systems using AMD Athlon processors can hang when an AGP program such as 3D WinBench 2000 is used. The problem can occur whether or not an NVIDIA video adaptor is installed.

The solution is to edit the registry to prevent the Memory Manager from using the processor's Page Size Extension feature. For a more complete explanation see <http://support.microsoft.com/support/kb/articles/Q270/7/15.ASP>

## Desktop Manager Does Not Re-Center Logon Screen

On Windows NT 4.0, Windows 2000, and Windows XP multi-display systems that are set to nView Span mode, the Windows logon screen is centered on the extended desktop. This usually causes it to be split across two displays, which users may find annoying. Although users can normally use the Desktop Manager to restrict a window's appearance to one display, security restrictions in the operating systems prevent this in the case of the logon screen.

## Issues with Video Mirror

Table 2.1 lists current known issues with NVIDIA Video Mirror functionality.

**Table 2.1** Known Issues with Video Mirror

Issues	Windows XP/2000	Windows NT 4.0	Windows 9x
Video Mirror is not yet implemented for applications using Video Port Extensions (VPE).	x		x
If Video Mirror is enabled but a full-screen display does not appear, one of the following problems may have occurred:			
Video Mirror can only function when overlay is being used. The video player may not be able to create an overlay if another application is using the overlay, or the desktop display resolution is too high. You can lower the desktop resolution, pixel depth, or refresh rate.	x		x
Video Mirror requires some extra memory to run. Try closing other DirectX or OpenGL applications that may be running.	x		x
You may need to close and restart your video application for Video Mirror enabling or disabling to take effect.	x		x
Some video players that cannot detect the presence of Video Mirror stop playing if they are minimized or completely obscured by another window. For example, Media Player can exhibit this problem.	x		x

## CHAPTER

## 3

# THE RELEASE 70 DRIVER

This chapter covers the following main topics:

- “Hardware and Software Support” on page 25
- “Driver Installation” on page 28

See the section “Release 70 Enhancements” on page 34 for a summary of Release 70 features and enhancements.

## Hardware and Software Support

---

### Supported Operating Systems

---

This Release 70 driver includes drivers designed for the following Microsoft® operating systems:

- Microsoft Windows® XP
  - Windows XP Media Center Edition 2005
  - Windows XP Media Center Edition 2004
  - Windows XP Professional
  - Windows XP Home Edition
  - Windows XP 64-bit Edition for 64-Bit Extended Systems
  - Windows Server 2003 SP1 for 64-Bit Extended Systems
- Microsoft Windows 2000 and Windows NT® 4.0
- Microsoft Windows 98 and Windows Millennium Edition (Me), collectively called Windows 9x in this document

## Supported NVIDIA Products

Table 3.1 lists the NVIDIA products supported by the Release 70 driver. The products are listed in the approximate order of their performance.

**Table 3.1** Supported NVIDIA GPU-Based Products

NVIDIA Desktop Products	NVIDIA Workstation Products
GeForce 6200 GeForce 6200 with TurboCache GeForce 6600 GeForce 6600 GT GeForce 6610 XL GeForce 6800 Ultra GeForce 6800 GeForce 6800 GT GeForce 6800 LE	Quadro FX 4400 Quadro FX 540 Quadro FX 1400 Quadro FX 4000 Quadro FX 4000 SDI Quadro FX 3450 Quadro FX 3400 Quadro FX 1300
GeForce FX 5950 Ultra GeForce FX 5700 Ultra GeForce FX 5700 GeForce FX 5700LE GeForce FX 5700VE GeForce PCX 5750 GeForce FX 5900 GeForce FX 5900 Ultra GeForce FX 5900 XT GeForce FX 5900ZT GeForce PCX 5900 GeForce FX 5200 Ultra GeForce FX 5200 LE GeForce FX 5200 GeForce FX 5500 GeForce FX 5100 GeForce PCX 5300 GeForce FX 5600 Ultra GeForce FX 5600 GeForce FX 5600XT GeForce FX 5600SE GeForce FX 5800 Ultra GeForce FX 5800	Quadro FX 1100 Quadro FX 330 Quadro FX 3000(G) Quadro FX 600 Quadro FX 500 Quadro NVS 285 Quadro NVS 280 PCI Quadro FX 2000 Quadro FX 1000 Quadro FX 700
GeForce4 Ti 4800 GeForce4 Ti 4800 SE GeForce4 Ti 4200 w/AGP 8x GeForce4 Ti 4600 GeForce4 Ti 4400 GeForce4 Ti 4200	Quadro4 980 XGL Quadro4 900 XGL Quadro4 750 XGL Quadro4 700 XGL Quadro4 500 XGL
GeForce3 GeForce3 Ti 500 GeForce3 Ti 200	Quadro DCC



**Table 3.1** Supported NVIDIA GPU-Based Products (continued)

<b>NVIDIA Desktop Products</b>	<b>NVIDIA Workstation Products</b>
GeForce4 MX 440 w/AGP 8x GeForce4 MX 440 SE w/AGP 8x GeForce4 MX 460 GeForce4 MX 440 GeForce4 MX 420 GeForce PCX 4300 GeForce4 MX Integrated Graphics	Quadro4 580 XGL Quadro NVS 280 Quadro4 380 XGL Quadro4 550 XGL Quadro NVS 200 Quadro NVS 400
GeForce2 Ti GeForce2 Ultra GeForce2 Pro GeForce2 GTS	Quadro2 Pro
GeForce2 MX GeForce2 MX400 GeForce2 MX200 GeForce2 MX100 GeForce2 MX Integrated Graphics	Quadro2 MXR Quadro2 EX
GeForce 256 GeForce 256 DDR	Quadro

## Supported Languages

---

The Release 70 ForceWare Graphics Drivers supports the following languages in the main driver Control Panel:

English (USA)	German	Portuguese (Euro/Iberian)
English (UK)	Greek	Russian
Arabic	Hebrew	Slovak
Chinese (Simplified)	Hungarian	Slovenian
Chinese (Traditional)	Italian	Spanish
Czech	Japanese	Spanish (Latin America)
Danish	Korean	Swedish
Dutch	Norwegian	Thai
Finnish	Polish	Turkish
French	Portuguese (Brazil)	

# Driver Installation

---

## System Requirements

---

- “Minimum Hard Disk Space” on page 28
- “Additional Operating System Requirements” on page 29

## Minimum Hard Disk Space

The minimum hard disk space requirement for each operating system are listed in Table 3.2, Table 3.3, and Table 3.4:

**Table 3.2** Hard Disk Space Requirements—English

Operating System	Minimum Hard Disk Space
Windows XP (all editions)	26.02 MB
Windows 2000	26.02 MB
Windows NT 4.0	20.25 MB
Windows Me	23.45 MB
Windows 98	23.45 MB

**Table 3.3** Hard Disk Space Requirements—Non-English Languages

Operating System	Minimum Hard Disk Space
Windows XP (all editions)	20.91 MB
Windows 2000	20.91 MB
Windows NT 4.0	20.91 MB
Windows Me	20.91 MB
Windows 98	20.91 MB

**Table 3.4** Hard Disk Space Requirements—Full International Package

Operating System	Minimum Hard Disk Space
Windows XP (all editions)	46.93 MB
Windows 2000	46.93 MB
Windows NT 4.0	41.16 MB
Windows Me	44.36 MB
Windows 98	44.36 MB

## Additional Operating System Requirements

The operating systems in [Table 3.5](#) require the additional packages listed in order to be supported by NVIDIA.

**Table 3.5** Additional Operating System Requirements

Operating System	Additional Requirements
Windows NT 4.0	Service Pack 4
Windows 98	Microsoft DirectX™ 5

## Installation Instructions

---

### Before You Begin

- If you do not have System Administrator access privileges, it is assumed that the appropriate person with System Administrator access in your organization will set up and install the NVIDIA graphics driver software on your computer.
- The installation process copies all necessary files for operation into the appropriate directories.
- The nView system files are copied to your **Windows\System** directory.
- nView Desktop Manager Profile files (\*.tvp) are saved in the **Windows\Nview** directory.  
Depending on the version of the NVIDIA driver previously installed, profiles may also be located in the **Documents and Settings\All Users\Application Data\nView\_Profiles** directory.
- As part of the install process, an uninstall is registered in your system.
- Under Windows Me and Windows XP, the NVIDIA driver is installed in “Dualview mode” display. However, note that the second display is not activated by default, but must be enabled.
- Under Windows 2000, the NVIDIA Display Driver is installed in Span mode. See the instructions in the *ForceWare Graphics Drivers User’s Guide* for instructions on how to install nView DualView mode.

## Preserving Settings Before Upgrading Your Software

Before uninstalling or installing software, you can preserve your nView Desktop Manager and/or NVIDIA Display settings by using the nView Desktop Manager Profiles features.

**Note:** Follow the steps below and/or refer to the *NVIDIA nView Desktop Manager User's Guide* for details. Under Windows XP/2000 and Windows NT 4.0, you must have, at least, **Power User** access privileges in order to create or save a profile. (Refer to Windows Help if you need an explanation of Power User access rights.)

Follow the steps below and/or refer to the *NVIDIA nView Desktop Manager User's Guide* for details.

- 1 Open the nView Desktop Manager Profiles page (Figure 4.1).
- 2 To preserve your current settings, you can use either the **Save** or the **New** option from the nView Desktop Manager Profiles page:
  - If you want to overwrite the currently loaded profile with your changed settings, use the **Save** option. Notice that a warning message indicates that you are about to overwrite the selected profile.
  - If you want to retain the currently loaded profile and want to save your changed settings to a new file, click the **New** option. Enter a name and description of the profile in the New Profile dialog box. For example, you can name this profile **My Settings**.
- 3 If you are an “advanced” user and want to customize certain settings in the saved profile, click **Advanced** << to expand the dialog box (Figure 4.2).
- 4 To customize the settings, you can select or clear any of the settings check boxes.
- 5 Click **Save** to return to the main Profiles page.

If you created a new profile, you will see the name of the newly created profile in the profiles list.

If you overwrote a current profile, the same profile name is retained in the list.

**Note:** nView Desktop Manager profile (. **tvfp**) files are saved in the **Windows\ nView** directory. Depending on the version of the NVIDIA driver previously installed, profiles may also be saved in the **Documents and Settings\All Users\Application Data\ nView\_Profiles** directory.
- 6 Now you can uninstall your current driver for a driver upgrade.
- 7 After you restart your computer following an NVIDIA new driver install, you can easily load the saved profile from the Profiles page of nView Desktop Manager.

## About Using Saved Profiles in Another Computer

You can easily use any saved profile (.tvp file in the `Windows\nView` directory) from one computer and use it in another computer, if you want. You'll need to copy it to the `Windows\nView` directory of a computer that has the NVIDIA ForceWare graphics display driver, etc. installed properly. Then this profile can be loaded from another computer from the nView Desktop Manager Profiles page just as it can from your original computer.

## Uninstalling the NVIDIA Display Driver Software

*Note: It is highly recommended that you follow the steps in this section to completely uninstall the NVIDIA Display Driver software before updating to a new version of the software.*

To uninstall the nView software, follow these steps:

- 1 From the Windows taskbar, click **Start > Settings > Control Panel** to open the Control Panel window.
- 2 Double-click the **Add/Remove Programs** item.
- 3 Click the **NVIDIA Display Driver** item from the list.
- 4 Click **Change/Remove**.
- 5 Click **Yes** to continue.

A prompt appears asking whether you want to delete all of the saved nView profiles.

- If you click **Yes**, all of the nView software and all of your saved profiles will be deleted.
- If you click **No**, the nView software is removed, but the profile files are saved in the `Windows\nView` directory on your hard disk.

Your system now restarts.

## Installing the NVIDIA ForceWare Graphics Drivers

- 1 Follow the instructions on the NVIDIA .com Web site driver download page to locate the appropriate driver to download, based on your hardware and operating system.
- 2 Click the driver download link.  
The license agreement dialog box appears.
- 3 Click **Accept** if you accept the terms of the agreement, then either open the file or save the file to your PC and open it later.  
Opening the EXE file launches the NVIDIA InstallShield Wizard.
- 4 Follow the instructions in the NVIDIA InstallShield Wizard to complete the installation.

## CHAPTER

## 4

# NVIDIA DRIVER HISTORY

This chapter provides the driver release history and summarizes the features and enhancements that have been introduced in each release. It contains these sections:

- “Driver Release History” on page 34
- “Release 70 Enhancements” on page 34
- “Release 65 Enhancements” on page 36
- “Release 60 Enhancements” on page 38
- “Release 55 Enhancements” on page 40
- “Release 50 Enhancements” on page 41
- “Release 40 Enhancements” on page 45
- “Release 35 Enhancements” on page 47
- “Release 25 Enhancements” on page 48
- “Release 20 Enhancements” on page 49
- “Release 10 Enhancements” on page 49

## Driver Release History

---

Release 70 is the latest NVIDIA driver available. [Table 4.1](#) contains a summary of some previous driver releases and the versions associated with them. Some versions listed may not have been released outside of NVIDIA.

**Table 4.1** NVIDIA Drivers for Windows

Driver	Name	Versions	Comments
Release 70	ForceWare	71.84, 71.89	
Release 65	ForceWare	66.77, 66.93, 67.02, 67.03, 67.66	
Release 60	ForceWare	61.76, 61.77	
Release 55	ForceWare	56.64, 56.72, 57.30	
Release 50	ForceWare	52.16, 53.04	
Release 40	Detonator FX	44.03–45.xx	
Release 40	Detonator 40	40.60–44.02	
Release 35	Detonator 35	35.60–37.80	
Release 25	Detonator 25	26.00–32.90	
Release 20	Detonator XP	21.83–23.xx	
Release 10	Detonator 3 v1x.xx	10.00–17.xx	

---

## Release 70 Enhancements

---

### Support for Newest GeForce 6 Series GPUs

---

All driver modules within Release 70 support the latest GPUs from the NVIDIA GeForce 6 Series.

### Additional SLI Support

---

Release 70 adds support for the following combinations of PCI Express graphics cards & chipsets:

Chipset	PCI-Express Graphics Cards
NVIDIA nForce4 SLI	
NVIDIA nForce Professional 2200	GeForce 6800 LE + GeForce 6800 LE
NVIDIA nForce Professional 2200 + NVIDIA nForce Professional 2050	

---



## Improved Video Functionality

---

- Improved video scaling for the newest GeForce 6 Series GPUs
- Improved de-interlacing
- Windows Media Video 9 (WMV9) Video Acceleration
  - Includes support for hardware acceleration decoding of WMV9 video files on GeForce 6 series GPUs.
  - A software update from Microsoft is required to enable this feature.

## Desktop Manager Wizard Improvements

---

- Improved Setup Wizard for Display Monitor, TV, and HDTV.
- New Hot Keys—Toggle Stereo 3D Display and Transparent Desktop Lock

## Control Panel Interface Improvements

---

- Improved HDTV-over-DVI User Interface, and support for arbitrary overscan/underscan for HDTV-over-DVI
- Improved pages—Driver Information Screen, Advanced Timings, Change Resolutions
- New property pages - SLI (available with NVIDIA SLI graphics cards) and Tools.

New features—**Play On My Display**, **Best fit scaling** option, and ability to rename the monitors in the display menu on the nView Page.

## Release 65 Enhancements

---

### SLI Support

---

Release 65 supports the new Scalable Link Interface (SLI) technology for improved performance using dual high-end graphics cards<sup>1</sup> that support SLI technology.

The following combinations of PCI Express graphics cards & chipsets are supported in this release of the driver:

Chipset	PCI-Express Graphics Cards
Intel(R) E7525	GeForce 6800 Ultra + GeForce 6800 Ultra GeForce 6800 GT + GeForce 6800 GT
NVIDIA nForce4 SLI	GeForce 6800 Ultra + GeForce 6800 Ultra GeForce 6800 GT + GeForce 6800 GT GeForce 6800 + GeForce 6800 GeForce 6600 GT + GeForce 6600 GT
NVIDIA nForce Professional 2200	GeForce 6800 Ultra + GeForce 6800 Ultra GeForce 6800 GT + GeForce 6800 GT GeForce 6800 + GeForce 6800 GeForce 6600 GT + GeForce 6600 GT
NVIDIA nForce Professional 2200 + NVIDIA nForce Professional 2050	GeForce 6800 Ultra + GeForce 6800 Ultra GeForce 6800 GT + GeForce 6800 GT GeForce 6800 + GeForce 6800 GeForce 6600 GT + GeForce 6600 GT

### 512 MB Frame Buffer Support

---

ForceWare Release 65 graphics drivers provide memory management techniques for supporting 512 MB versions of the new generation of NVIDIA graphics cards, such as the GeForce 6800 or Quadro FX 4000 and later.

### OS Support

---

Release 65 supports Windows XP SP2 and will support the next version of Windows XP Media Center Edition—“Symphony”.

---

1. Cards must be of the same vendor and model number.

## Enhancements in Driver Performance

---

### Improved Robustness

The ForceWare Release 65 graphics driver offers improved stability and robustness in DirectX and 2D graphics.

### Video Enhancements

Video enhancements in Release 65 include

- Optimized motion compensation and video processing to take advantage of the capabilities of the newest generation of NVIDIA GPUs.
- Support for Microsoft's Certified Output Protection Protocol (COPP)
- Improved media capture interface
- Inverse Telecine (3:2 pulldown detection and correction)

Inverse telecine extracts the original 24 fps of film-sourced video for encoding, and prevents encoding of unnecessary frames, eliminating artifacts. To enable this feature, you must download the NVIDIA DVD Decoder, for use with Windows Media Player or Windows Media Center Edition.

### 3D Graphics API Enhancements

- **DirectX Enhancements**
  - DirectX 9.0c Compatibility
  - Supports the capabilities of the newest generation of NVIDIA GPUs for improved DirectX shader handling and reduced CPU overhead
- **OpenGL Enhancements**
  - Improved and more efficient vertex\_buffer\_object (VBO) handling
  - More efficient memory management for improved performance under DualView

### HDTV Support Enhancements

Release 65 offers improved HDTV over DVI underscan support, exposed through the NVIDIA control panel.

### Desktop Manager and Control Panel Improvements

---

Release 65 includes the following improvements in the Desktop Manager and control panel:

- New Negative LOD Bias control page (effective with version 67.03)
- High Resolution Scalable Desktop Performance

- Desktop Manager Wizards
- Desktop Manager Hot Keys, Toolbars, and Gridlines
- Application Profiles
- Control Panel User Interface

## Release 60 Enhancements

---

### Latest GPU Support

---

The ForceWare Release 60 graphics drivers support the newest generation of NVIDIA GPUs, including

- **Improved vertex and pixel compilers**
- **Video shaders**

### PCI Express Support

---

ForceWare Release 60 offers 2D and 3D graphics driver support for the PCI Express I/O, including

- **DirectX support**
- **Enhanced OpenGL support**

Improved texture memory management and bandwidth utilization

### Enhancements in Driver Performance

---

- **Enhanced Robustness**

The ForceWare Release 60 graphics driver offers more robust stability and compatibility in DirectX support, antialiasing, and desktop rotation.

- **Reduction of OCA issues**
- **Dynamic Video Memory**

Streamlines OS system resources for large frame buffer configurations

## 3D Graphics API Enhancements

---

### Direct3D

- DirectX 9.0c Support

### OpenGL

- New drivers for the OpenGL ARB shading language (GLSL)
- Enhanced support for Windows XP 64-Bit Edition and IA32-E.
- New extensions
  - `GL_NV_fragment_program2`
  - `GL_EXT_blend_equation_separate`
  - `NV_vertex_program3`
  - `ATI_draw_buffers`
  - `ATI_texture_float`
  - `ATI_texture_mirror_once`
  - `GL_ARB_texture_non_power_of_two`
  - `GL_NVX_centroid_sample`
  - `GL_NVX_conditional_render`

## Release 55 Enhancements

---

The Release 55 driver offers new features not found in previous releases of the NVIDIA Driver for Windows. The following highlights the new features in Release 55:

### PCI Express Support

---

2D and 3D graphics drivers support the PCI Express I/O.

### PAE Support

---

2D and 3D graphics driver support systems that utilize physical address extensions (PAE)<sup>2</sup>.

### nView Desktop Manager Enhancements

---

- Seamless nView support between 32-bit and 64-bit processes on Windows 64-bit Edition
- Dual NVKeystone support for independent keystone trapezoids under nView Span modes.
- Per-display Desktop Management

### User Interface Enhancements

---

- New application profiles capability lets you associate a collection of driver settings—such as antialiasing and display quality settings—with an application.
- Easy access standalone panel, independent of the Microsoft Display Properties window.
- Improved multi-adapter support.
- Improved TV and HDTV Controls

### Video Support Enhancements

---

- Advanced de-interlacing and inverse 3:2 pull-down capability
- Enhanced HDTV and Media Center support

---

2. PAE is an extension that enables Intel compatible computers to address more than 4 GB of physical memory.

## 3D Graphics API Enhancements

---

### Direct3D

- Improved antialiasing performance
- Improved shaders

### OpenGL

New extension: `GL_NV_pixel_buffer_object`

## Release 50 Enhancements

---

The Release 50 driver offers new features not found in previous releases of the NVIDIA Driver for Windows.

### 64-Bit Support

---

Driver Release 50 offers AMD64 and IA64 OS support.

### Dynamic Memory Mapping

---

Dynamic memory mapping adds support for 256 MB graphics cards for video, display, and OpenGL drivers.

### NVIDIA Unified Compiler

---

As today's GPUs become more and more programmable they are entering a similar era to that of the CPU. For CPUs, it is common for developers to implement code paths specifically optimized for AMD or Intel (e.g MMX and 3DNow!). Programmable GPUs are no different. Because architectures vary, it makes sense that one common assembly language can't cover all the nuances of specific GPU micro-architectures. In fact, different code paths make different GPUs go faster. As a result with the GeForce FX architecture, NVIDIA has implemented a GPU-specific compiler that can be used to optimize application performance.

## Display Driver Changes and New Features

---

- **Rotation support**

Added to Windows Me/9x.

- **Custom resolutions**

Provides the user with the ability to construct new modes via the NVIDIA control panel.

- **Screen editing**

Allows removing infrequently used screens by dragging them from the NVIDIA screen menu to a list. Screens can be restored by simply clicking the **Restore Defaults** option or by dragging them back to the menu.

- **Dynamic EDIDs**

Updates the master mode list with new modes contained in the connected device's EDID.

- **Support for special panels and devices**

- Large panels
- Wide panels
- Seamless Span modes in the mode list to support T221 style large panels
- Interlaced modes for HDTV
- DVI device hot plugging

- **Frame Lock functionality**

Enables synchronizing applications across multiple displays for Quadro FX series of GPUs.

- **Edge Blend functionality**

Enables blending the adjacent edges of overlapped displays on projection systems for Quadro FX series of GPUs.

## Video—New Features

---

### Video Mixing Renderer (VMR) support

VMR support is provided for full-screen video and Microsoft's DirectX Video Acceleration (DXVA).

## PowerMizer—New Features

---

- **Dynamic peak power control**
- **Thermal Protection version 2.0**



## User Interface Changes

---

### New Features

- **Dualview**

This feature is available and supported as a single-step process from the nView Display Modes panel and APIs. Switching in and out of all driver modes is possible with several choices for display device pairs:

  - Analog display + digital display
  - Digital display + analog display
  - TV + digital display
  - Other combinations
- **Change Resolution panel**
- **Improved Color Correction panel with enhanced Gamma**
- **HDTV support**

### Improvements

- **Menus for NVIDIA user components**
- **Easy access to nView Display Mode or Windows Display Properties Settings through the NVIDIA Settings taskbar utility**
- **Panel access for non-administrator users**
- **Tool tips for the scroll bar on the NVIDIA menu**
- **Improved Performance and Quality Settings panel**
- **Improved TV-Out settings panel**
- **Improved device selection (display pairs)**
- **Separate Overlay Controls panel**
- **Separate Full Screen Video settings panel**

### nView

---

- **Action Toolbar**
- **Kinematic mouse actions**
- **Resolution per Desktop support**
- **Application monitor exclusions and inclusions**

- **Internet Explorer pop-up prevention**
- **Monitor grids**
- **Keystone luma compensation**
- **Multiview support**
- **nViewCmd**
- **NVManagement**
- **Faster Desktop switching**
- **Integrated control panels**
- **New Setup Wizard**
- **Driver independence**

## **DirectX Graphics**

---

- **Floating point render targets**
- **Multi-element textures**
- **Improved antialiasing compatibility**
- **Improved shader handling and stability**
- **Improved render-to-texture performance**

## **OpenGL**

---

- **Windows 9x Rotation support**
- **New supported extension:** `GL_ARB_occlusion_query`
- **Faster Vertex Processing Pipeline**  
Improved geometry processing and display list support provided.
- **Faster vertex and fragment program compilers**
- **Improved support for** `ARB_vertex_buffer_object` **extension (vbo)**
- **Improved stability during mode switches, antialiasing, and UBB**
- **Faster texture downloads**

## Release 40 Enhancements

---

The Release 40 driver offers new features not found in previous releases of the NVIDIA Driver for Windows.

### Enhanced Display Driver, DirectX, and Video Capabilities

---

- **Windows XP SP1**

- Release 40 supports Windows XP SP1, Windows Media Center edition, and Windows XP Tablet PC.
- Release 40 provides support for bugcheck EA callbacks, enabling OCA EA failures to be resolved more quickly while assisting to identify failure causes—such as due to chip instability or overclocking.

- **Rotation support**

Release 40 supports the NVRotate™ desktop rotation<sup>3</sup> feature, which allows the user to rotate the desktop by 90, 180, or 270 degrees.

- **DirectX 9 support**

With Microsoft's release of DirectX 9 runtime, Release 40 version 42.51 and later provides support for DirectX 9, which includes the new vertex shaders, antialiasing modes, and multi-display device support.

- **Video enhancements**

- Flip Sync functionality support
- Support for multiple Macrovision clients
- Simplified Video Mirror controls

- **TV Overscan support**

Depending on the TV encoder used, Release 40 supports TV overscan—allowing the user to eliminate the black borders around the TV display screen. This option is accessible through the NVIDIA display properties control panel.

---

3. Rotation is not supported on graphics cards based on the TNT, TNT2 or Vanta product families.

## New Graphical User Interface

---

- **Media Center Tray application**

The Media Center Tray is a new application that replaces QuickTweak, and contains menu items that provide access to all NVIDIA user interface software applications.

- **New Display Properties panel**

The NVIDIA control panel has been redesigned to make navigating easier and to improve control over the display adapter settings.

## Enhanced nView Desktop Manager Features

---

- **Additional OS support**

NVIDIA nView supports Windows NT 4.0, Windows 9x/Me, and Windows 2000/XP.

- **Zoom support**

New fixed-frame zoom and bi-directional zoom editing capability added.

- **NV-Switcher**

Improved ALT+TAB switcher which also supports Desktop switching and is expandable to other NVIDIA features.

- **Color-keyed windows**

Allows the user to color key windows for easy identification when activating them on the desktop.

- **Taskbar and menu transparency**

- **New window actions and application settings.**

- **Keystone support<sup>4</sup>**

---

4. Keystone is not supported on graphics cards based on the TNT, TNT2 or Vanta product families.

## OpenGL Enhancements

---

- **OpenGL 1.4 ICD with NVIDIA extensions**

New extension includes ARB\_vertex\_program, which co-exists with NV\_vertex\_program.

- **Enhancements for workstation applications**

- NV1x line stipple enhancements, and NV2x 2-sided lighting optimizations
- Immediate mode optimizations for Solid Edge, and display list tuning for UGv17.

- **Multi-monitor improvements**

New accelerated spanning mode is enabled by default.

- **Reduced power consumption**

Release 40 utilizes CPU cycles more efficiently, resulting in reduced power consumption without sacrificing performance.

- **Dynamic AGP/Video memory management**

## Release 35 Enhancements

---

The Release 35 driver offers new features not found in previous releases of the NVIDIA Driver for Windows.

- **NVRotate™**

The NVRotate feature lets you view your Windows desktop in Landscape or Portrait mode. You can rotate desktop by 90, 180 and 270 degrees.

- **Improved and expanded NVIDIA nView Desktop Manager application**

nView Desktop Manager has now been redesigned with a convenient user interface and many new features and utilities designed to solve specific problems for users. Utilities such as anti-keystoning support and flat panel monitor calibration screens and utilities have been designed to improve windows multi-display usability.

For example, NVKeystone can be set to compensate for keystoning effects on your windows display, allowing you to fix distorted projection images. This feature is primarily for laptop (mobile) computers.

**Note:** For further details on NVKeystone and many new nView Desktop Manager features, see the *NVIDIA nView Desktop Manager User's Guide*.

## Release 25 Enhancements

---

The Release 25 driver offers new features not found in previous releases of the NVIDIA Driver for Windows.

- **nView**

The latest multi-monitor technology encompassing driver support, multi-monitor GPU architecture, and desktop management support. nView consists of two main modules:

- nView Display Manager

New support for multi-monitor functionality, including Clone modes, and Horizontal and Vertical spanning modes.

- nView Desktop Manager

A control panel and desktop management engine for application window management and extension of functions, and support for multiple desktops.

- **Dualview support for Windows 2000**

- **Improved DirectX Video Acceleration (DXVA)**

- **Special support for NVIDIA NV25 capabilities**

- IDCT support for DirectX VA
- Improved antialiasing compatibility and performance
- Support for NV25 hardware overlays under OpenGL

- **Enhanced 3D stereo functionality**

- Support for lenticular lenses on LCDs
- Stereo DIN connector support
- VSYNC Off with 3D Stereo
- Stereo API for developers

- **OpenGL enhancement**

- New `render_to_texture` extension

## Release 20 Enhancements

---

The Release 20 driver offers new features not found in previous releases of the NVIDIA Driver for Windows.

- **OpenGL 1.3 ICD with NVIDIA extensions**
- **OpenGL performance optimizations**
- **Optimized DirectX pipeline with NVIDIA pixel and vertex shaders**
- **Full support for Windows XP, including**
  - Full hardware acceleration for Windows XP GUI features
  - Accelerated Windows XP 3D performance through the NVIDIA XPress Link technology

## Release 10 Enhancements

---

The Release 10 driver offers new features not found in previous releases of the NVIDIA Driver for Windows.

- **Support for Microsoft DirectX 8**
- **Support for Microsoft DirectX VA 1.0**
- **NVIDIA 3D Stereo (requires installation of the optional Stereoscopic driver)**

The driver provides stereoscopic viewing capabilities for games and still images.

- **Special support for NVIDIA GeForce3 capabilities:**
  - Pixel and Vertex Shader support for DirectX 8 and OpenGL<sup>®</sup>
  - Quincunx antialiasing option for enhanced image quality and performance
- **AMD<sup>®</sup> Athlon<sup>™</sup> Processor and Intel Pentium<sup>®</sup> 4 Processor optimizations**
- **Improved TwinView<sup>™</sup> interface**
-





## APPENDIX



# MODE SUPPORT FOR WINDOWS

This chapter details the Windows modes supported by the Release 70 driver for NVIDIA products. It contains these sections:

- “General Mode Support Information” on page 52
- “Default Modes Supported by GPU” on page 53
- “Modes Supported by DACs and TV Encoders” on page 94

## General Mode Support Information

---

The NVIDIA graphics driver includes a standard list of display modes that are supported by default. These modes are listed in the section “[Default Modes Supported by GPU](#)” on page 53.

The actual modes available depend on the capabilities of the display. In addition, the NVIDIA graphics driver has a “dynamic EDID detection” capability and will make available *additional* modes that are listed in the display EDID, provided the graphics hardware can support it.

The NVIDIA graphics driver also supports the high resolutions available with the displays listed in [Table A.1](#) as well as the non-standard modes listed in [Table A.2](#).

**Table A.1** Modes Supported for High Resolution Displays

Display	Maximum Resolution	Hardware Requirements
IBM T221 (Dual Link DVI)	3840x2400 @ 48Hz	<ul style="list-style-type: none"> <li>All High-end Quadro FX (see list of products in “<a href="#">Quadro FX Family of High End GPUs</a>” on page 61.)</li> </ul>
Apple 30” Cinema HD Display (Dual link DVI)	2560x1600 @ 60Hz	<ul style="list-style-type: none"> <li>All High-end Quadro FX (see list of products in “<a href="#">Quadro FX Family of High End GPUs</a>” on page 61.)</li> <li>GeForce 6800 with 512 MB</li> </ul>

**Table A.2** Non-standard Modes Supported

Resolution
1680 x 1050
1366 x 768

## Default Modes Supported by GPU

---


This section lists the modes that are included by default in the driver INF for the following product families:

- “GeForce FX Family and GeForce 6 Series” on page 54
- “Quadro FX Family of High End GPUs” on page 61
- “GeForce and Quadro GPUs, GeForce2 and GeForce3 Series of GPUs” on page 68
- “GeForce2 MX, GeForce4 MX, Quadro4, and GeForce4 Ti Series GPUs, GeForce4 MX Integrated GPU” on page 71
- “GeForce2 Integrated GPU” on page 77
- “Quadro4 9xx / 7xx XGL Products” on page 80
- “Quadro FX Family and Quadro NVS Series GPUs” on page 86
- “TNT2 and Vanta Products” on page 92

## Understanding the Mode Format

---

Figure A.1 gives an example of how to read the mode information presented in this section.

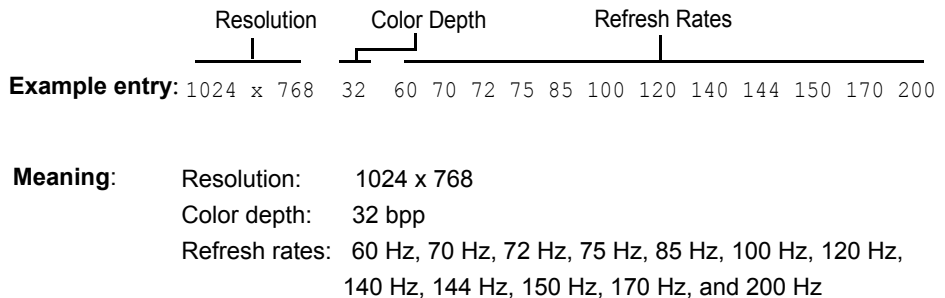

**Figure A.1** Mode Format

**Note:**

- Horizontal spanning modes of 3840x1080 and above, and vertical spanning modes of 1920x2160 and above generally require at least 32 MB of video memory at 32 bpp.
- An “i” next to the refresh rate indicates an interlaced refresh rate.

## **GeForce FX Family and GeForce 6 Series**

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA GeForce 6800 / 6800 Ultra
- NVIDIA GeForce 6800LE
- NVIDIA GeForce 6800GT
- NVIDIA GeForce 6600 / 6600 GT
- NVIDIA GeForce 6610 XL
- NVIDIA GeForce 6200
- NVIDIA GeForce 6200 w/TurboCache™
- NVIDIA Quadro NVS 285
- NVIDIA GeForce FX 5800 / 5800 Ultra
- NVIDIA GeForce FX 5600 / 5600 Ultra
- NVIDIA GeForce FX 5600XT
- NVIDIA GeForce FX 5200 / 5200 Ultra
- NVIDIA GeForce FX 5200/GeForce PCX 5300
- NVIDIA GeForce FX 5200LE
- NVIDIA GeForce FX 5500
- NVIDIA GeForce FX 5100
- NVIDIA GeForce FX 5900 Ultra
- NVIDIA GeForce FX 5900/GeForce PCX 5900
- NVIDIA GeForce FX 5900XT
- NVIDIA GeForce FX 5950 Ultra
- NVIDIA GeForce FX 5900ZT
- NVIDIA GeForce FX 5700 Ultra/GeForce PCX 5750
- NVIDIA GeForce FX 5700
- NVIDIA GeForce FX 5700LE
- NVIDIA GeForce FX 5700VE

## Standard Modes

320 x 200	8		60 70 72 75
320 x 240	8		60 70 72 75
400 x 300	8		60 70 72 75
480 x 360	8		60 70 72 75
512 x 384	8		60 70 72 75
640 x 400	8		60 70 72 75
640 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	8		60
720 x 576	8		60
800 x 600	8		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1088 x 612	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	8		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 768	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 800	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 960	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1024	8		60 70 72 75 85 100 120 140 144 150 170
1360 x 768	8		60 70 72 75 85 100 120 140 144 150 170
1600 x 900	8		60 70 72 75 85 100 120 140 144 150
1600 x 1024	8		60 70 72 75 85 100 120
1600 x 1200	8		60 70 72 75 85 100 120
1920 x 1080	8	30i	60 70 72 75 85 100
1920 x 1200	8		60 70 72 75 85 100
1920 x 1440	8		60 70 72 75 85
2048 x 1536	8		60 70 72 75 85

---

320 x 200	16		60 70 72 75
320 x 240	16		60 70 72 75
400 x 300	16		60 70 72 75
480 x 360	16		60 70 72 75
512 x 384	16		60 70 72 75
640 x 400	16		60 70 72 75
640 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	16		60
720 x 576	16		60

800 x 600	16		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1088 x 612	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	16		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 768	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 800	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 960	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1024	16		60 70 72 75 85 100 120 140 144 150 170
1360 x 768	16		60 70 72 75 85 100 120 140 144 150 170
1600 x 900	16		60 70 72 75 85 100 120 140 144 150
1600 x 1024	16		60 70 72 75 85 100 120
1600 x 1200	16		60 70 72 75 85 100 120
1920 x 1080	16	30i	60 70 72 75 85 100
1920 x 1200	16		60 70 72 75 85 100
1920 x 1440	16		60 70 72 75 85
2048 x 1536	16		60 70 72 75 85

---

320 x 200	32		60 70 72 75
320 x 240	32		60 70 72 75
400 x 300	32		60 70 72 75
480 x 360	32		60 70 72 75
512 x 384	32		60 70 72 75
640 x 400	32		60 70 72 75
640 x 480	32		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	32		60
720 x 576	32		60
800 x 600	32		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	32		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	32		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 768	32		60 70 72 75 85 100 120 140 144 150 170 200
1088 x 612	32		60 70 72 75 85 100 120 140 144 150 170 200
1152 x 864	32		60 70 72 75 85 100 120 140 144 150 170
1280 x 720	32		60 70 72 75 85 100 120 140 144 150
1280 x 768	32		60 70 72 75 85 100 120 140 144 150
1280 x 800	32		60 70 72 75 85 100 120 140 144 150
1280 x 960	32		60 70 72 75 85 100 120 140 144 150

1280 x 1024	32		60 70 72 75 85 100 120 140 144 150
1360 x 768	32		60 70 72 75 85 100 120 140 144 150
1600 x 900	32		60 70 72 75 85 100 120
1600 x 1024	32		60 70 72 75 85 100
1600 x 1200	32		60 70 72 75 85 100
1920 x 1080	32	30i	60 70 72 75 85
1920 x 1200	32		60 70 72 75 85
1920 x 1440	32		60 70 72 75 85
2048 x 1536	32		60 70 72 75 85

## Horizontal Spanning Modes

1280 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	8		60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	8		60 70 72 75 85 100 120 140 144 150 170 200 240
2176 x 612	8		60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	8		60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 768	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 800	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 960	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 1024	8		60 70 72 75 85 100 120 140 144 150 170
2720 x 768	8		60 70 72 75 85 100 120 140 144 150 170
3200 x 900	8		60 70 72 75 85 100 120 140 144 150
3200 x 1024	8		60 70 72 75 85 100 120
3200 x 1200	8		60 70 72 75 85 100 120
3840 x 1080	8	30i	60 70 72 75 85 100
3840 x 1200	8		60 70 72 75 85 100
3840 x 1440	8		60 70 72 75 85
4096 x 1536	8		60 70 72 75 85

---

1280 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	16		60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	16		60 70 72 75 85 100 120 140 144 150 170 200 240
2176 x 612	16		60 70 72 75 85 100 120 140 144 150 170 200 240

2304 x 864	16		60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	16		60 70 72 75 85 100 120 140 144 150 170
2560 x 768	16		60 70 72 75 85 100 120 140 144 150 170
2560 x 800	16		60 70 72 75 85 100 120 140 144 150 170
2560 x 960	16		60 70 72 75 85 100 120 140 144 150 170
2560 x 1024	16		60 70 72 75 85 100 120 140 144 150 170
2720 x 768	16		60 70 72 75 85 100 120 140 144 150 170
3200 x 900	16		60 70 72 75 85 100 120 140 144 150
3200 x 1024	16		60 70 72 75 85 100 120
3200 x 1200	16		60 70 72 75 85 100 120
3840 x 1080	16	30i	60 70 72 75 85 100
3840 x 1200	16		60 70 72 75 85 100
3840 x 1440	16		60 70 72 75 85
4096 x 1536	16		60 70 72 75 85

---

1280 x 480	32		60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	32		60 70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	32		60 70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	32		60 70 72 75 85 100 120 140 144 150 170 200 240
2048 x 768	32		60 70 72 75 85 100 120 140 144 150 170 200
2176 x 612	32		60 70 72 75 85 100 120 140 144 150 170 200
2304 x 864	32		60 70 72 75 85 100 120 140 144 150 170
2560 x 720	32		60 70 72 75 85 100 120 140 144 150
2560 x 768	32		60 70 72 75 85 100 120 140 144 150
2560 x 800	32		60 70 72 75 85 100 120 140 144 150
2560 x 960	32		60 70 72 75 85 100 120 140 144 150
2560 x 1024	32		60 70 72 75 85 100 120 140 144 150
2720 x 768	32		60 70 72 75 85 100 120 140 144 150
3200 x 900	32		60 70 72 75 85 100 120
3200 x 1024	32		60 70 72 75 85 100
3200 x 1200	32		60 70 72 75 85 100
3840 x 1080	32	30i	60 70 72 75 85
3840 x 1200	32		60 70 72 75 85
3840 x 1440	32		60 70 72 75 85
4096 x 1536	32		60 70 72 75 85



## Vertical Spanning Modes

640 x 960	8		60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	8		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	8		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1088 x 1224	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	8		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1600	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1920	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 2048	8		60 70 72 75 85 100 120 140 144 150 170
1360 x 1536	8		60 70 72 75 85 100 120 140 144 150 170
1600 x 1800	8		60 70 72 75 85 100 120 140 144 150
1600 x 2048	8		60 70 72 75 85 100 120
1600 x 2400	8		60 70 72 75 85 100 120
1920 x 2160	8	30i	60 70 72 75 85 100
1920 x 2400	8		60 70 72 75 85 100
1920 x 2880	8		60 70 72 75 85
2048 x 3072	8		60 70 72 75 85

---

640 x 960	16		60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	16		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	16		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1088 x 1224	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	16		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1600	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1920	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 2048	16		60 70 72 75 85 100 120 140 144 150 170
1360 x 1536	16		60 70 72 75 85 100 120 140 144 150 170
1600 x 1800	16		60 70 72 75 85 100 120 140 144 150
1600 x 2048	16		60 70 72 75 85 100 120
1600 x 2400	16		60 70 72 75 85 100 120

1920 x 2160	16	30i	60 70 72 75 85 100
1920 x 2400	16		60 70 72 75 85 100
1920 x 2880	16		60 70 72 75 85
2048 x 3072	16		60 70 72 75 85
-----			
640 x 960	32		60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	32		60 70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	32		60 70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	32		60 70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	32		60 70 72 75 85 100 120 140 144 150 170 200
1088 x 1224	32		60 70 72 75 85 100 120 140 144 150 170 200
1152 x 1728	32		60 70 72 75 85 100 120 140 144 150 170
1280 x 1440	32		60 70 72 75 85 100 120 140 144 150
1280 x 1536	32		60 70 72 75 85 100 120 140 144 150
1280 x 1600	32		60 70 72 75 85 100 120 140 144 150
1280 x 1920	32		60 70 72 75 85 100 120 140 144 150
1280 x 2048	32		60 70 72 75 85 100 120 140 144 150
1360 x 1536	32		60 70 72 75 85 100 120 140 144 150
1600 x 1800	32		60 70 72 75 85 100 120
1600 x 2048	32		60 70 72 75 85 100
1600 x 2400	32		60 70 72 75 85 100
1920 x 2160	32	30i	60 70 72 75 85
1920 x 2400	32		60 70 72 75 85
1920 x 2880	32		60 70 72 75 85
2048 x 3072	32		60 70 72 75 85

## Quadro FX Family of High End GPUs

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA Quadro FX 3400 / Quadro FX 4400
- NVIDIA Quadro FX 4000
- NVIDIA Quadro FX 3450 / Quadro FX 4000 SDI
- NVIDIA Quadro FX 1400
- NVIDIA Quadro FX 540
- NVIDIA Quadro FX 3000 / Quadro FX 1300
- NVIDIA Quadro FX 700

### Standard Modes

320 x 200	8	60	70 72 75																
320 x 240	8	60	70 72 75																
400 x 300	8	60	70 72 75																
480 x 360	8	60	70 72 75																
512 x 384	8	60	70 72 75																
640 x 400	8	60	70 72 75																
640 x 480	8	60	70 72 75	85 100 120 140 144 150 170 200 240															
720 x 480	8	60																	
720 x 576	8	60																	
800 x 600	8	50 60	70 72 75 85 100 120 140 144 150 170 200 240																
848 x 480	8	60	70 72 75 85 100 120 140 144 150 170 200 240																
960 x 600	8	60	70 72 75 85 100 120 140 144 150 170 200 240																
960 x 1200	8	61																	
1024 x 768	8	50 60	70 72 75 85 100 120 140 144 150 170 200 240																
1088 x 612	8	60	70 72 75 85 100 120 140 144 150 170 200 240																
1152 x 864	8	60	70 72 75 85 100 120 140 144 150 170 200																
1280 x 720	8	60	70 72 75 85 100 120 140 144 150 170																
1280 x 768	8	60	70 72 75 85 100 120 140 144 150 170																
1280 x 800	8	60	70 72 75 85 100 120 140 144 150 170																
1280 x 960	8	60	70 72 75 85 100 120 140 144 150 170																
1280 x 1024	8	50 60	70 72 75 85 100 120 140 144 150 170																
1360 x 768	8	60	70 72 75 85 100 120 140 144 150 170																
1600 x 900	8	60	70 72 75 85 100 120 140 144 150																

1600 x 1024	8		60	70	72	75	85	100	120											
1600 x 1200	8		50	60	70	72	75	85	100	120										
1920 x 1080	8	30i	60	70	72	75	85	100												
1920 x 1154	8		50																	
1920 x 1200	8		50	60	70	72	75	85	100											
1920 x 1440	8		60	70	72	75	85													
2048 x 1536	8		60	70	72	75	85													
-----																				
320 x 200	16		60	70	72	75														
320 x 240	16		60	70	72	75														
400 x 300	16		60	70	72	75														
480 x 360	16		60	70	72	75														
512 x 384	16		60	70	72	75														
640 x 400	16		60	70	72	75														
640 x 480	16		60	70	72	75	85	100	120	140	144	150	170	200	240					
720 x 480	16		60																	
720 x 576	16		60																	
800 x 600	16		50	60	70	72	75	85	100	120	140	144	150	170	200	240				
848 x 480	16		60	70	72	75	85	100	120	140	144	150	170	200	240					
960 x 600	16		60	70	72	75	85	100	120	140	144	150	170	200	240					
960 x 1200	16			61																
1024 x 768	16		50	60	70	72	75	85	100	120	140	144	150	170	200	240				
1088 x 612	16		60	70	72	75	85	100	120	140	144	150	170	200	240					
1152 x 864	16		60	70	72	75	85	100	120	140	144	150	170	200						
1280 x 720	16		60	70	72	75	85	100	120	140	144	150	170							
1280 x 768	16		60	70	72	75	85	100	120	140	144	150	170							
1280 x 800	16		60	70	72	75	85	100	120	140	144	150	170							
1280 x 960	16		60	70	72	75	85	100	120	140	144	150	170							
1280 x 1024	16		50	60	70	72	75	85	100	120	140	144	150	170						
1360 x 768	16		60	70	72	75	85	100	120	140	144	150	170							
1600 x 900	16		60	70	72	75	85	100	120	140	144	150								
1600 x 1024	16		60	70	72	75	85	100	120											
1600 x 1200	16		50	60	70	72	75	85	100	120										
1920 x 1080	16	30i	60	70	72	75	85	100												
1920 x 1154	16		50																	
1920 x 1200	16		50	60	70	72	75	85	100											
1920 x 1440	16		60	70	72	75	85													
2048 x 1536	16		60	70	72	75	85													
-----																				

320 x 200	32	60	70 72 75
320 x 240	32	60	70 72 75
400 x 300	32	60	70 72 75
480 x 360	32	60	70 72 75
512 x 384	32	60	70 72 75
640 x 400	32	60	70 72 75
640 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	32	60	
720 x 576	32	60	
800 x 600	32	50 60	70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	32	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	32	61	
1024 x 768	32	50 60	70 72 75 85 100 120 140 144 150 170 200
1088 x 612	32	60	70 72 75 85 100 120 140 144 150 170 200
1152 x 864	32	60	70 72 75 85 100 120 140 144 150 170
1280 x 720	32	60	70 72 75 85 100 120 140 144 150
1280 x 768	32	60	70 72 75 85 100 120 140 144 150
1280 x 800	32	60	70 72 75 85 100 120 140 144 150
1280 x 960	32	60	70 72 75 85 100 120 140 144 150
1280 x 1024	32	50 60	70 72 75 85 100 120 140 144 150
1360 x 768	32	60	70 72 75 85 100 120 140 144 150
1600 x 900	32	60	70 72 75 85 100 120
1600 x 1024	32	60	70 72 75 85 100
1600 x 1200	32	50 60	70 72 75 85 100
1920 x 1080	32	30i 60	70 72 75 85
1920 x 1154	32	50	
1920 x 1200	32	50 60	70 72 75 85
1920 x 1440	32	60	70 72 75 85
2048 x 1536	32	60	70 72 75 85

## Horizontal Spanning Modes

1280 x 480	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	8	50 60	70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 1200	8	61	
2048 x 768	8	50 60	70 72 75 85 100 120 140 144 150 170 200 240

2176 x 612	8		60	70	72	75	85	100	120	140	144	150	170	200	240
2304 x 864	8		60	70	72	75	85	100	120	140	144	150	170	200	
2560 x 720	8		60	70	72	75	85	100	120	140	144	150	170		
2560 x 768	8		60	70	72	75	85	100	120	140	144	150	170		
2560 x 800	8		60	70	72	75	85	100	120	140	144	150	170		
2560 x 960	8		60	70	72	75	85	100	120	140	144	150	170		
2560 x 1024	8		50 60	70	72	75	85	100	120	140	144	150	170		
2720 x 768	8		60	70	72	75	85	100	120	140	144	150	170		
3200 x 900	8		60	70	72	75	85	100	120	140	144	150			
3200 x 1024	8		60	70	72	75	85	100	120						
3200 x 1200	8		50 60	70	72	75	85	100	120						
3840 x 1080	8	30i	60	70	72	75	85	100							
3840 x 1154	8		50												
3840 x 1200	8		50 60	70	72	75	85	100							
3840 x 1440	8		60	70	72	75	85								
4096 x 1536	8		60	70	72	75	85								

---

1280 x 480	16		60	70	72	75	85	100	120	140	144	150	170	200	240
1600 x 600	16		50 60	70	72	75	85	100	120	140	144	150	170	200	240
1696 x 480	16		60	70	72	75	85	100	120	140	144	150	170	200	240
1920 x 600	16		60	70	72	75	85	100	120	140	144	150	170	200	240
1920 x 1200	16			61											
2048 x 768	16		50 60	70	72	75	85	100	120	140	144	150	170	200	240
2176 x 612	16		60	70	72	75	85	100	120	140	144	150	170	200	240
2304 x 864	16		60	70	72	75	85	100	120	140	144	150	170	200	
2560 x 720	16		60	70	72	75	85	100	120	140	144	150	170		
2560 x 768	16		60	70	72	75	85	100	120	140	144	150	170		
2560 x 800	16		60	70	72	75	85	100	120	140	144	150	170		
2560 x 960	16		60	70	72	75	85	100	120	140	144	150	170		
2560 x 1024	16		50 60	70	72	75	85	100	120	140	144	150	170		
2720 x 768	16		60	70	72	75	85	100	120	140	144	150	170		
3200 x 900	16		60	70	72	75	85	100	120	140	144	150			
3200 x 1024	16		60	70	72	75	85	100	120						
3200 x 1200	16		50 60	70	72	75	85	100	120						
3840 x 1080	16	30i	60	70	72	75	85	100							
3840 x 1154	16		50												
3840 x 1200	16		50 60	70	72	75	85	100							
3840 x 1440	16		60	70	72	75	85								
4096 x 1536	16		60	70	72	75	85								

```

-----
1280 x 480 32          60  70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600 32        50 60  70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480 32          60  70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600 32          60  70 72 75 85 100 120 140 144 150 170 200 240
1920 x 1200 32          61
2048 x 768 32        50 60  70 72 75 85 100 120 140 144 150 170 200
2176 x 612 32          60  70 72 75 85 100 120 140 144 150 170 200
2304 x 864 32          60  70 72 75 85 100 120 140 144 150 170
2560 x 720 32          60  70 72 75 85 100 120 140 144 150
2560 x 768 32          60  70 72 75 85 100 120 140 144 150
2560 x 800 32          60  70 72 75 85 100 120 140 144 150
2560 x 960 32          60  70 72 75 85 100 120 140 144 150
2560 x 1024 32        50 60  70 72 75 85 100 120 140 144 150
2720 x 768 32          60  70 72 75 85 100 120 140 144 150
3200 x 900 32          60  70 72 75 85 100 120
3200 x 1024 32         60  70 72 75 85 100
3200 x 1200 32        50 60  70 72 75 85 100
3840 x 1080 32  30i  60  70 72 75 85
3840 x 1154 32         50
3840 x 1200 32        50 60  70 72 75 85
3840 x 1440 32         60  70 72 75 85
4096 x 1536 32        60  70 72 75 85

```

## Vertical Spanning Modes

```

640 x 960 8          60  70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200 8        50 60  70 72 75 85 100 120 140 144 150 170 200 240
848 x 960 8          60  70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200 8          60  70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536 8        50 60  70 72 75 85 100 120 140 144 150 170 200 240
1088 x 1224 8          60  70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728 8          60  70 72 75 85 100 120 140 144 150 170 200
1280 x 1440 8          60  70 72 75 85 100 120 140 144 150 170
1280 x 1536 8          60  70 72 75 85 100 120 140 144 150 170
1280 x 1600 8          60  70 72 75 85 100 120 140 144 150 170
1280 x 1920 8          60  70 72 75 85 100 120 140 144 150 170
1280 x 2048 8        50 60  70 72 75 85 100 120 140 144 150 170
1360 x 1536 8          60  70 72 75 85 100 120 140 144 150 170

```

1600 x 1800	8	60	70 72 75 85 100 120 140 144 150
1600 x 2048	8	60	70 72 75 85 100 120
1600 x 2400	8	50 60	70 72 75 85 100 120
1920 x 2160	8	30i 60	70 72 75 85 100
1920 x 2308	8	50	
1920 x 2400	8	50 60	70 72 75 85 100
1920 x 2880	8	60	70 72 75 85
2048 x 3072	8	60	70 72 75 85
-----			
640 x 960	16	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	16	50 60	70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	16	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	16	50 60	70 72 75 85 100 120 140 144 150 170 200 240
1088 x 1224	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	16	60	70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1536	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1600	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1920	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 2048	16	50 60	70 72 75 85 100 120 140 144 150 170
1360 x 1536	16	60	70 72 75 85 100 120 140 144 150 170
1600 x 1800	16	60	70 72 75 85 100 120 140 144 150
1600 x 2048	16	60	70 72 75 85 100 120
1600 x 2400	16	50 60	70 72 75 85 100 120
1920 x 2160	16	30i 60	70 72 75 85 100
1920 x 2308	16	50	
1920 x 2400	16	50 60	70 72 75 85 100
1920 x 2880	16	60	70 72 75 85
2048 x 3072	16	60	70 72 75 85
-----			
640 x 960	32	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	32	50 60	70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	32	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	32	60	70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	32	50 60	70 72 75 85 100 120 140 144 150 170 200
1088 x 1224	32	60	70 72 75 85 100 120 140 144 150 170 200
1152 x 1728	32	60	70 72 75 85 100 120 140 144 150 170
1280 x 1440	32	60	70 72 75 85 100 120 140 144 150



1280 x 1536	32		60	70	72	75	85	100	120	140	144	150
1280 x 1600	32		60	70	72	75	85	100	120	140	144	150
1280 x 1920	32		60	70	72	75	85	100	120	140	144	150
1280 x 2048	32		50 60	70	72	75	85	100	120	140	144	150
1360 x 1536	32		60	70	72	75	85	100	120	140	144	150
1600 x 1800	32		60	70	72	75	85	100	120			
1600 x 2048	32		60	70	72	75	85	100				
1600 x 2400	32		50 60	70	72	75	85	100				
1920 x 2160	32	30i	60	70	72	75	85					
1920 x 2308	32		50									
1920 x 2400	32		50 60	70	72	75	85					
1920 x 2880	32		60	70	72	75	85					
2048 x 3072	32		60	70	72	75	85					

## GeForce and Quadro GPUs, GeForce2 and GeForce3 Series of GPUs

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA GeForce 256
- NVIDIA GeForce DDR
- NVIDIA Quadro
- NVIDIA GeForce2 GTS/GeForce2 Pro
- NVIDIA GeForce2 Ti
- NVIDIA GeForce2 Ultra
- NVIDIA Quadro2 Pro
- NVIDIA GeForce3
- NVIDIA GeForce3 Ti 200
- NVIDIA GeForce3 Ti 500
- NVIDIA Quadro DCC

320 x 200	8	60 70 72 75
320 x 240	8	60 70 72 75
400 x 300	8	60 70 72 75
480 x 360	8	60 70 72 75
512 x 384	8	60 70 72 75
640 x 400	8	60 70 72 75
640 x 480	8	60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	8	60
720 x 576	8	60
800 x 600	8	60 70 72 75 85 100 120 140 144 170 200 240
848 x 480	8	60 70 72 75 85 100 120 140 144 170 200 240
1024 x 768	8	60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	8	60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 768	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 960	8	60 70 72 75 85 100 120 140 144 150 170
1280 x 1024	8	60 70 72 75 85 100 120 140 144 150 170
1360 x 768	8	60 70 72 75 85 100 120 140 144 150 170
1600 x 900	8	60 70 72 75 85 100 120 140 144 150

1600 x 1024	8		60 70 72 75 85 100 120
1600 x 1200	8		60 70 72 75 85 100 120
1920 x 1080	8	30i	60 70 72 75 85 100
1920 x 1200	8		60 70 72 75 85 100
1920 x 1440	8		60 70 72 75 85
2048 x 1536	8		60 70 72 75
-----			
320 x 200	16		60 70 72 75
320 x 240	16		60 70 72 75
400 x 300	16		60 70 72 75
480 x 360	16		60 70 72 75
512 x 384	16		60 70 72 75
640 x 400	16		60 70 72 75
640 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	16		60
720 x 576	16		60
800 x 600	16		60 70 72 75 85 100 120 140 144 170 200 240
848 x 480	16		60 70 72 75 85 100 120 140 144 170 200 240
1024 x 768	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	16		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 768	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 960	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1024	16		60 70 72 75 85 100 120 140 144 150 170
1360 x 768	16		60 70 72 75 85 100 120 140 144 150 170
1600 x 900	16		60 70 72 75 85 100 120 140 144 150
1600 x 1024	16		60 70 72 75 85 100 120
1600 x 1200	16		60 70 72 75 85 100 120
1920 x 1080	16	30i	60 70 72 75 85 100
1920 x 1200	16		60 70 72 75 85 100
1920 x 1440	16		60 70 72 75 85
2048 x 1536	16		60 70 72 75
-----			
320 x 200	32		60 70 72 75
320 x 240	32		60 70 72 75
400 x 300	32		60 70 72 75
480 x 360	32		60 70 72 75
512 x 384	32		60 70 72 75
640 x 400	32		60 70 72 75

640 x 480	32		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	32		60
720 x 576	32		60
800 x 600	32		60 70 72 75 85 100 120 140 144 170 200 240
848 x 480	32		60 70 72 75 85 100 120 140 144 170 200 240
1024 x 768	32		60 70 72 75 85 100 120 140 144 150 170 200
1152 x 864	32		60 70 72 75 85 100 120 140 150 170
1280 x 720	32		60 70 72 75 85 100 120 140 150
1280 x 768	32		60 70 72 75 85 100 120 140 150
1280 x 960	32		60 70 72 75 85 100 120 140 150
1280 x 1024	32		60 70 72 75 85 100 120 140 150
1360 x 768	32		60 70 72 75 85 100 120 140 150
1600 x 900	32		60 70 72 75 85 100 120
1600 x 1024	32		60 70 72 75 85 100
1600 x 1200	32		60 70 72 75 85 100
1920 x 1080	32	30i	60 70 72 75 85
1920 x 1200	32		60 70 72 75 85
1920 x 1440	32		60 70 75
2048 x 1536	32		60

## **GeForce2 MX, GeForce4 MX, Quadro4, and GeForce4 Ti Series GPUs, GeForce4 MX Integrated GPU**

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA GeForce2 MX/MX 400
- NVIDIA GeForce2 MX 100/200
- NVIDIA GeForce4 MX 460
- NVIDIA GeForce4 MX 440
- NVIDIA GeForce4 MX 420
- NVIDIA GeForce4 MX 440-SE
- NVIDIA GeForce4 MX 440SE with AGP8X
- NVIDIA GeForce4 MX 440 with AGP8x / GeForce PCX 4300
- NVIDIA GeForce MX 4000
- NVIDIA GeForce4 MX Integrated GPU
- NVIDIA GeForce4 Ti 4800
- NVIDIA GeForce4 Ti 4800 SE
- NVIDIA GeForce4 Ti 4600
- NVIDIA GeForce4 Ti 4400
- NVIDIA GeForce4 Ti 4200
- NVIDIA GeForce4 Ti 4200 with AGP8X
- NVIDIA Quadro4 550 XGL
- NVIDIA Quadro2 MXR/EX
- NVIDIA Quadro NVS
- NVIDIA Quadro4 580 XGL
- NVIDIA Quadro4 380 XGL

## Standard Modes

320 x 200	8		60 70 72 75
320 x 240	8		60 70 72 75
400 x 300	8		60 70 72 75
480 x 360	8		60 70 72 75
512 x 384	8		60 70 72 75
640 x 400	8		60 70 72 75
640 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	8		60
720 x 576	8		60
800 x 600	8		60 70 72 75 85 100 120 140 144 170 200 240
848 x 480	8		60 70 72 75 85 100 120 140 144 170 200 240
960 x 600	8		60 70 72 75 85 100 120 140 144 170 200
1024 x 768	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	8		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 720	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 768	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 800	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 960	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1024	8		60 70 72 75 85 100 120 140 144 150 170
1360 x 768	8		60 70 72 75 85 100 120 140 144 150 170
1600 x 900	8		60 70 72 75 85 100 120 140 144 150
1600 x 1024	8		60 70 72 75 85 100 120
1600 x 1200	8		60 70 72 75 85 100 120
1920 x 1080	8	30i	60 70 72 75 85 100
1920 x 1200	8		60 70 72 75 85 100
1920 x 1440	8		60 70 72 75 85
2048 x 1536	8		60 70 72 75
-----			
320 x 200	16		60 70 72 75
320 x 240	16		60 70 72 75
400 x 300	16		60 70 72 75
480 x 360	16		60 70 72 75
512 x 384	16		60 70 72 75
640 x 400	16		60 70 72 75
640 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	16		60
720 x 576	16		60

800 x 600	16		60 70 72 75 85 100 120 140 144	170 200 240
848 x 480	16		60 70 72 75 85 100 120 140 144	170 200 240
960 x 600	16		60 70 72 75 85 100 120 140 144	170 200
1024 x 768	16		60 70 72 75 85 100 120 140 144	150 170 200 240
1152 x 864	16		60 70 72 75 85 100 120 140 144	150 170 200
1280 x 720	16		60 70 72 75 85 100 120 140 144	150 170
1280 x 768	16		60 70 72 75 85 100 120 140 144	150 170
1280 x 800	16		60 70 72 75 85 100 120 140 144	150 170
1280 x 960	16		60 70 72 75 85 100 120 140 144	150 170
1280 x 1024	16		60 70 72 75 85 100 120 140 144	150 170
1360 x 768	16		60 70 72 75 85 100 120 140 144	150 170
1600 x 900	16		60 70 72 75 85 100 120 140 144	150
1600 x 1024	16		60 70 72 75 85 100 120	
1600 x 1200	16		60 70 72 75 85 100 120	
1920 x 1080	16	30i	60 70 72 75 85 100	
1920 x 1200	16		60 70 72 75 85 100	
1920 x 1440	16		60 70 72 75 85	
2048 x 1536	16		60 70 72 75	

---

320 x 200	32		60 70 72 75	
320 x 240	32		60 70 72 75	
400 x 300	32		60 70 72 75	
480 x 360	32		60 70 72 75	
512 x 384	32		60 70 72 75	
640 x 400	32		60 70 72 75	
640 x 480	32		60 70 72 75 85 100 120 140 144	150 170 200 240
720 x 480	32		60	
720 x 576	32		60	
800 x 600	32		60 70 72 75 85 100 120 140 144	170 200 240
848 x 480	32		60 70 72 75 85 100 120 140 144	170 200 240
960 x 600	32		60 70 72 75 85 100 120 140 144	170 200
1024 x 768	32		60 70 72 75 85 100 120 140 144	150 170 200
1152 x 864	32		60 70 72 75 85 100 120 140	150 170
1280 x 720	32		60 70 72 75 85 100 120 140	150
1280 x 768	32		60 70 72 75 85 100 120 140	150
1280 x 800	32		60 70 72 75 85 100 120 140	150
1280 x 960	32		60 70 72 75 85 100 120 140	150
1280 x 1024	32		60 70 72 75 85 100 120 140	150
1360 x 768	32		60 70 72 75 85 100 120 140	150

1600 x 900	32		60 70 72 75 85 100 120
1600 x 1024	32		60 70 72 75 85 100
1600 x 1200	32		60 70 72 75 85 100
1920 x 1080	32	30i	60 70 72 75 85
1920 x 1200	32		60 70 72 75 85
1920 x 1440	32		60 70 75
2048 x 1536	32		60

## Horizontal Spanning Modes

1280 x 480	8		60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	8		60 70 72 75 85 100 120 140 144 170 200 240
1696 x 480	8		60 70 72 75 85 100 120 140 144 170 200 240
1920 x 600	8		60 70 72 75 85 100 120 140 144 170 200
2048 x 768	8		60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	8		60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 768	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 800	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 960	8		60 70 72 75 85 100 120 140 144 150 170
2560 x 1024	8		60 70 72 75 85 100 120 140 144 150 170
2720 x 768	8		60 70 72 75 85 100 120 140 144 150 170
3200 x 900	8		60 70 72 75 85 100 120 140 144 150
3200 x 1024	8		60 70 72 75 85 100 120
3200 x 1200	8		60 70 72 75 85 100 120
3840 x 1080	8	30i	60 70 72 75 85 100
3840 x 1200	8		60 70 72 75 85 100
3840 x 1440	8		60 70 72 75 85
4096 x 1536	8		60 70 72 75

---

1280 x 480	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	16		60 70 72 75 85 100 120 140 144 170 200 240
1696 x 480	16		60 70 72 75 85 100 120 140 144 170 200 240
1920 x 600	16		60 70 72 75 85 100 120 140 144 170 200
2048 x 768	16		60 70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	16		60 70 72 75 85 100 120 140 144 150 170 200
2560 x 720	16		60 70 72 75 85 100 120 140 144 150 170
2560 x 768	16		60 70 72 75 85 100 120 140 144 150 170
2560 x 800	16		60 70 72 75 85 100 120 140 144 150 170



2560 x 960	16		60 70 72 75 85 100 120 140 144 150 170
2560 x 1024	16		60 70 72 75 85 100 120 140 144 150 170
2720 x 768	16		60 70 72 75 85 100 120 140 144 150 170
3200 x 900	16		60 70 72 75 85 100 120 140 144 150
3200 x 1024	16		60 70 72 75 85 100 120
3200 x 1200	16		60 70 72 75 85 100 120
3840 x 1080	16	30i	60 70 72 75 85 100
3840 x 1200	16		60 70 72 75 85 100
3840 x 1440	16		60 70 72 75 85
4096 x 1536	16		60 70 72 75

---

1280 x 480	32		60 70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	32		60 70 72 75 85 100 120 140 144 170 200 240
1696 x 480	32		60 70 72 75 85 100 120 140 144 170 200 240
1920 x 600	32		60 70 72 75 85 100 120 140 144 170 200
2048 x 768	32		60 70 72 75 85 100 120 140 144 150 170 200
2304 x 864	32		60 70 72 75 85 100 120 140 150 170
2560 x 720	32		60 70 72 75 85 100 120 140 150
2560 x 768	32		60 70 72 75 85 100 120 140 150
2560 x 800	32		60 70 72 75 85 100 120 140 150
2560 x 960	32		60 70 72 75 85 100 120 140 150
2560 x 1024	32		60 70 72 75 85 100 120 140 150
2720 x 768	32		60 70 72 75 85 100 120 140 150
3200 x 900	32		60 70 72 75 85 100 120
3200 x 1024	32		60 70 72 75 85 100
3200 x 1200	32		60 70 72 75 85 100
3840 x 1080	32	30i	60 70 72 75 85
3840 x 1200	32		60 70 72 75 85
3840 x 1440	32		60 70 75
4096 x 1536	32		60

## Vertical Spanning Modes

640 x 960	8		60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	8		60 70 72 75 85 100 120 140 144 170 200 240
848 x 960	8		60 70 72 75 85 100 120 140 144 170 200 240
960 x 1200	8		60 70 72 75 85 100 120 140 144 170 200
1024 x 1536	8		60 70 72 75 85 100 120 140 144 150 170 200 240

1152 x 1728	8		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1600	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 1920	8		60 70 72 75 85 100 120 140 144 150 170
1280 x 2048	8		60 70 72 75 85 100 120 140 144 150 170
1360 x 1536	8		60 70 72 75 85 100 120 140 144 150 170
1600 x 1800	8		60 70 72 75 85 100 120 140 144 150
1600 x 2048	8		60 70 72 75 85 100 120
1600 x 2400	8		60 70 72 75 85 100 120
1920 x 2160	8	30i	60 70 72 75 85 100
1920 x 2400	8		60 70 72 75 85 100
1920 x 2880	8		60 70 72 75 85
2048 x 3072	8		60 70 72 75
-----			
640 x 960	16		60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	16		60 70 72 75 85 100 120 140 144 170 200 240
848 x 960	16		60 70 72 75 85 100 120 140 144 170 200 240
960 x 1200	16		60 70 72 75 85 100 120 140 144 170 200
1024 x 1536	16		60 70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	16		60 70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1536	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1600	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 1920	16		60 70 72 75 85 100 120 140 144 150 170
1280 x 2048	16		60 70 72 75 85 100 120 140 144 150 170
1360 x 1536	16		60 70 72 75 85 100 120 140 144 150 170
1600 x 1800	16		60 70 72 75 85 100 120 140 144 150
1600 x 2048	16		60 70 72 75 85 100 120
1600 x 2400	16		60 70 72 75 85 100 120
1920 x 2160	16	30i	60 70 72 75 85 100
1920 x 2400	16		60 70 72 75 85 100
1920 x 2880	16		60 70 72 75 85
2048 x 3072	16		60 70 72 75
-----			
640 x 960	32		60 70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	32		60 70 72 75 85 100 120 140 144 170 200 240
848 x 960	32		60 70 72 75 85 100 120 140 144 170 200 240
960 x 1200	32		60 70 72 75 85 100 120 140 144 170 200

1024 x 1536	32		60 70 72 75 85 100 120 140 144 150 170 200
1152 x 1728	32		60 70 72 75 85 100 120 140 150 170
1280 x 1440	32		60 70 72 75 85 100 120 140 150
1280 x 1536	32		60 70 72 75 85 100 120 140 150
1280 x 1600	32		60 70 72 75 85 100 120 140 150
1280 x 1920	32		60 70 72 75 85 100 120 140 150
1280 x 2048	32		60 70 72 75 85 100 120 140 150
1360 x 1536	32		60 70 72 75 85 100 120 140 150
1600 x 1800	32		60 70 72 75 85 100 120
1600 x 2048	32		60 70 72 75 85 100
1600 x 2400	32		60 70 72 75 85 100
1920 x 2160	32	30i	60 70 72 75 85
1920 x 2400	32		60 70 72 75 85
1920 x 2880	32		60 70 75
2048 x 3072	32		60

## GeForce2 Integrated GPU

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following product:

- NVIDIA GeForce2 Integrated GPU

### Standard Modes

320 x 200	8		60 70 72 75
320 x 240	8		60 70 72 75
400 x 300	8		60 70 72 75
480 x 360	8		60 70 72 75
512 x 384	8		60 70 72 75
640 x 400	8		60 70 72 75
640 x 480	8		60 72 75 85 100
720 x 480	8		60
720 x 576	8		60
800 x 480	8		60 72 75 85 100
800 x 600	8		60 72 75 85 100
1024 x 768	8		60 72 75 85 100
1280 x 768	8		60 72 75 85 100
1280 x 1024	8		60 72 75 85 100

1600 x 900	8		60	72	75	85	100
1600 x 1200	8		60	72	75	85	100
1920 x 1080	8	30i					
1920 x 1200	8		60	72	75	85	100
1920 x 1440	8		60	72	75	85	100
2048 x 1536	8		60	72	75	85	100

---

320 x 200	16		60	70	72	75	
320 x 240	16		60	70	72	75	
400 x 300	16		60	70	72	75	
480 x 360	16		60	70	72	75	
512 x 384	16		60	70	72	75	
640 x 400	16		60	70	72	75	
640 x 480	16		60	72	75	85	100
720 x 480	16		60				
720 x 576	16		60				
800 x 480	16		60	72	75	85	100
800 x 600	16		60	72	75	85	100
1024 x 768	16		60	72	75	85	100
1280 x 768	16		60	72	75	85	100
1280 x 1024	16		60	72	75	85	100
1600 x 900	16		60	72	75	85	100
1600 x 1200	16		60	72	75	85	100
1920 x 1080	16	30i					
1920 x 1200	16		60	72	75	85	100
1920 x 1440	16		60	72	75	85	100
2048 x 1536	16		60	72	75	85	100

---

320 x 200	32		60	70	72	75	
320 x 240	32		60	70	72	75	
400 x 300	32		60	70	72	75	
480 x 360	32		60	70	72	75	
512 x 384	32		60	70	72	75	
640 x 400	32		60	70	72	75	
640 x 480	32		60	72	75	85	100
720 x 480	32		60				
720 x 576	32		60				
800 x 480	32		60	72	75	85	100
800 x 600	32		60	72	75	85	100

1024 x 768	32	60	72 75 85 100
1280 x 768	32	60	72 75 85 100
1280 x 1024	32	60	72 75 85 100
1600 x 900	32	60	72 75 85 100
1600 x 1200	32	60	72 75 85 100
1920 x 1080	32	30i	
1920 x 1200	32	60	72 75 85 100
1920 x 1440	32	60	72 75
2048 x 1536	32	60	72

## Quadro4 9xx / 7xx XGL Products

---

This sections lists the supported display resolutions, color depths, and refresh rates for the following products:

- NVIDIA Quadro4 900 XGL
- NVIDIA Quadro4 750 XGL
- NVIDIA Quadro4 700 XGL
- NVIDIA Quadro4 980 XGL
- NVIDIA Quadro4 780 XGL

### Standard Modes

320 x 200	8	60	70	72	75												
320 x 240	8	60	70	72	75												
400 x 300	8	60	70	72	75												
480 x 360	8	60	70	72	75												
512 x 384	8	60	70	72	75												
640 x 400	8	60	70	72	75												
640 x 480	8	60	70	72	75	85	100	120	140	144	150	170	200	240			
720 x 480	8	60															
720 x 576	8	60															
800 x 600	8	60	70	72	75	85	100	120	140	144		170	200	240			
848 x 480	8	60	70	72	75	85	100	120	140	144		170	200	240			
960 x 600	8	60	70	72	75	85	100	120	140	144		170	200	240			
960 x 1200	8	61															
1024 x 768	8	60	70	72	75	85	100	120	140	144	150	170	200	240			
1152 x 864	8	60	70	72	75	85	100	120	140	144	150	170	200				
1280 x 720	8	60	70	72	75	85	100	120	140	144	150	170					
1280 x 768	8	60	70	72	75	85	100	120	140	144	150	170					
1280 x 800	8	60	70	72	75	85	100	120	140	144	150	170					
1280 x 960	8	60	70	72	75	85	100	120	140	144	150	170					
1280 x 1024	8	60	70	72	75	85	100	120	140	144	150	170					
1360 x 768	8	60	70	72	75	85	100	120	140	144	150	170					
1600 x 900	8	60	70	72	75	85	100	120	140	144	150						
1600 x 1024	8	60	70	72	75	85	100	120									
1600 x 1200	8	60	70	72	75	85	100	120									
1920 x 1080	8	30i	60	70	72	75	85	100									
1920 x 1200	8	60	70	72	75	85	100										

1920 x 1440	8	60	70 72 75 85
2048 x 1536	8	60	70 72 75
-----			
320 x 200	16	60	70 72 75
320 x 240	16	60	70 72 75
400 x 300	16	60	70 72 75
480 x 360	16	60	70 72 75
512 x 384	16	60	70 72 75
640 x 400	16	60	70 72 75
640 x 480	16	60	70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	16	60	
720 x 576	16	60	
800 x 600	16	60	70 72 75 85 100 120 140 144 170 200 240
848 x 480	16	60	70 72 75 85 100 120 140 144 170 200 240
960 x 600	16	60	70 72 75 85 100 120 140 144 170 200 240
960 x 1200	16	61	
1024 x 768	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1152 x 864	16	60	70 72 75 85 100 120 140 144 150 170 200
1280 x 720	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 768	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 800	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 960	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1024	16	60	70 72 75 85 100 120 140 144 150 170
1360 x 768	16	60	70 72 75 85 100 120 140 144 150 170
1600 x 900	16	60	70 72 75 85 100 120 140 144 150
1600 x 1024	16	60	70 72 75 85 100 120
1600 x 1200	16	60	70 72 75 85 100 120
1920 x 1080	16	30i	60 70 72 75 85 100
1920 x 1200	16	60	70 72 75 85 100
1920 x 1440	16	60	70 72 75 85
2048 x 1536	16	60	70 72 75
-----			
320 x 200	32	60	70 72 75
320 x 240	32	60	70 72 75
400 x 300	32	60	70 72 75
480 x 360	32	60	70 72 75
512 x 384	32	60	70 72 75
640 x 400	32	60	70 72 75
640 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240

720 x 480	32	60																		
720 x 576	32	60																		
800 x 600	32	60	70	72	75	85	100	120	140	144	170	200	240							
848 x 480	32	60	70	72	75	85	100	120	140	144	170	200	240							
960 x 600	32	60	70	72	75	85	100	120	140	144	170	200	240							
960 x 1200	32	61																		
1024 x 768	32	60	70	72	75	85	100	120	140	144	150	170	200							
1152 x 864	32	60	70	72	75	85	100	120	140	150	170									
1280 x 720	32	60	70	72	75	85	100	120	140	150										
1280 x 768	32	60	70	72	75	85	100	120	140	150										
1280 x 800	32	60	70	72	75	85	100	120	140	150										
1280 x 960	32	60	70	72	75	85	100	120	140	150										
1280 x 1024	32	60	70	72	75	85	100	120	140	150										
1360 x 768	32	60	70	72	75	85	100	120	140	150										
1600 x 900	32	60	70	72	75	85	100	120												
1600 x 1024	32	60	70	72	75	85	100													
1600 x 1200	32	60	70	72	75	85	100													
1920 x 1080	32	30i	60	70	72	75	85													
1920 x 1200	32	60	70	72	75	85														
1920 x 1440	32	60	70	75																
2048 x 1536	32	60																		

## Horizontal Spanning Modes

1280 x 480	8	60	70	72	75	85	100	120	140	144	150	170	200	240						
1600 x 600	8	60	70	72	75	85	100	120	140	144	170	200	240							
1696 x 480	8	60	70	72	75	85	100	120	140	144	170	200	240							
1920 x 600	8	60	70	72	75	85	100	120	140	144	170	200	240							
1920 x 1200	8	61																		
2048 x 768	8	60	70	72	75	85	100	120	140	144	150	170	200	240						
2304 x 864	8	60	70	72	75	85	100	120	140	144	150	170	200							
2560 x 720	8	60	70	72	75	85	100	120	140	144	150	170								
2560 x 768	8	60	70	72	75	85	100	120	140	144	150	170								
2560 x 800	8	60	70	72	75	85	100	120	140	144	150	170								
2560 x 960	8	60	70	72	75	85	100	120	140	144	150	170								
2560 x 1024	8	60	70	72	75	85	100	120	140	144	150	170								
2720 x 768	8	60	70	72	75	85	100	120	140	144	150	170								
3200 x 900	8	60	70	72	75	85	100	120	140	144	150									



3200 x 1024	8	60	70 72 75 85 100 120
3200 x 1200	8	60	70 72 75 85 100 120
3840 x 1080	8	30i 60	70 72 75 85 100
3840 x 1200	8	60	70 72 75 85 100
3840 x 1440	8	60	70 72 75 85
4096 x 1536	8	60	70 72 75

---

1280 x 480	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	16	60	70 72 75 85 100 120 140 144 170 200 240
1696 x 480	16	60	70 72 75 85 100 120 140 144 170 200 240
1920 x 600	16	60	70 72 75 85 100 120 140 144 170 200 240
1920 x 1200	16	61	
2048 x 768	16	60	70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	16	60	70 72 75 85 100 120 140 144 150 170 200
2560 x 720	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 768	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 800	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 960	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 1024	16	60	70 72 75 85 100 120 140 144 150 170
2720 x 768	16	60	70 72 75 85 100 120 140 144 150 170
3200 x 900	16	60	70 72 75 85 100 120 140 144 150
3200 x 1024	16	60	70 72 75 85 100 120
3200 x 1200	16	60	70 72 75 85 100 120
3840 x 1080	16	30i 60	70 72 75 85 100
3840 x 1200	16	60	70 72 75 85 100
3840 x 1440	16	60	70 72 75 85
4096 x 1536	16	60	70 72 75

---

1280 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	32	60	70 72 75 85 100 120 140 144 170 200 240
1696 x 480	32	60	70 72 75 85 100 120 140 144 170 200 240
1920 x 600	32	60	70 72 75 85 100 120 140 144 170 200 240
1920 x 1200	32	61	
2048 x 768	32	60	70 72 75 85 100 120 140 144 150 170 200
2304 x 864	32	60	70 72 75 85 100 120 140 150 170
2560 x 720	32	60	70 72 75 85 100 120 140 150
2560 x 768	32	60	70 72 75 85 100 120 140 150
2560 x 800	32	60	70 72 75 85 100 120 140 150
2560 x 960	32	60	70 72 75 85 100 120 140 150

2560 x 1024	32	60	70 72 75 85 100 120 140	150
2720 x 768	32	60	70 72 75 85 100 120 140	150
3200 x 900	32	60	70 72 75 85 100 120	
3200 x 1024	32	60	70 72 75 85 100	
3200 x 1200	32	60	70 72 75 85 100	
3840 x 1080	32	30i 60	70 72 75 85	
3840 x 1200	32	60	70 72 75 85	
3840 x 1440	32	60	70 75	
4096 x 1536	32	60		

## Vertical Spanning Modes

640 x 960	8	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	8	60	70 72 75 85 100 120 140 144 170 200 240
848 x 960	8	60	70 72 75 85 100 120 140 144 170 200 240
960 x 1200	8	60	70 72 75 85 100 120 140 144 170 200 240
1024 x 1536	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	8	60	70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 1536	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 1600	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 1920	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 2048	8	60	70 72 75 85 100 120 140 144 150 170
1360 x 1536	8	60	70 72 75 85 100 120 140 144 150 170
1600 x 1800	8	60	70 72 75 85 100 120 140 144 150
1600 x 2048	8	60	70 72 75 85 100 120
1600 x 2400	8	60	70 72 75 85 100 120
1920 x 2160	8	30i 60	70 72 75 85 100
1920 x 2400	8	60	70 72 75 85 100
1920 x 2880	8	60	70 72 75 85
2048 x 3072	8	60	70 72 75

---

640 x 960	16	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	16	60	70 72 75 85 100 120 140 144 170 200 240
848 x 960	16	60	70 72 75 85 100 120 140 144 170 200 240
960 x 1200	16	60	70 72 75 85 100 120 140 144 170 200 240
1024 x 1536	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	16	60	70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	16	60	70 72 75 85 100 120 140 144 150 170

1280 x 1536	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1600	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1920	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 2048	16	60	70 72 75 85 100 120 140 144 150 170
1360 x 1536	16	60	70 72 75 85 100 120 140 144 150 170
1600 x 1800	16	60	70 72 75 85 100 120 140 144 150
1600 x 2048	16	60	70 72 75 85 100 120
1600 x 2400	16	60	70 72 75 85 100 120
1920 x 2160	16	30i 60	70 72 75 85 100
1920 x 2400	16	60	70 72 75 85 100
1920 x 2880	16	60	70 72 75 85
2048 x 3072	16	60	70 72 75

---

640 x 960	32	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	32	60	70 72 75 85 100 120 140 144 170 200 240
848 x 960	32	60	70 72 75 85 100 120 140 144 170 200 240
960 x 1200	32	60	70 72 75 85 100 120 140 144 170 200 240
1024 x 1536	32	60	70 72 75 85 100 120 140 144 150 170 200
1152 x 1728	32	60	70 72 75 85 100 120 140 150 170
1280 x 1440	32	60	70 72 75 85 100 120 140 150
1280 x 1536	32	60	70 72 75 85 100 120 140 150
1280 x 1600	32	60	70 72 75 85 100 120 140 150
1280 x 1920	32	60	70 72 75 85 100 120 140 150
1280 x 2048	32	60	70 72 75 85 100 120 140 150
1360 x 1536	32	60	70 72 75 85 100 120 140 150
1600 x 1800	32	60	70 72 75 85 100 120
1600 x 2048	32	60	70 72 75 85 100
1600 x 2400	32	60	70 72 75 85 100
1920 x 2160	32	30i 60	70 72 75 85
1920 x 2400	32	60	70 72 75 85
1920 x 2880	32	60	70 75
2048 x 3072	32	60	

## Quadro FX Family and Quadro NVS Series GPUs

This sections lists the supported display resolutions, color depths, and refresh rates for the following GPUs:

- NVIDIA Quadro FX 2000
- NVIDIA Quadro FX 1000
- NVIDIA Quadro NVS 280 PCI / Quadro PCI-E Series
- NVIDIA Quadro FX 500
- NVIDIA Quadro FX 600
- NVIDIA Quadro FX 1100

### Standard Modes

320 x 200	8	60	70 72 75																	
320 x 240	8	60	70 72 75																	
400 x 300	8	60	70 72 75																	
480 x 360	8	60	70 72 75																	
512 x 384	8	60	70 72 75																	
640 x 400	8	60	70 72 75																	
640 x 480	8	60	70 72 75	85	100	120	140	144	150	170	200	240								
720 x 480	8	60																		
720 x 576	8	60																		
800 x 600	8	60	70 72 75	85	100	120	140	144	150	170	200	240								
848 x 480	8	60	70 72 75	85	100	120	140	144	150	170	200	240								
960 x 600	8	60	70 72 75	85	100	120	140	144	150	170	200	240								
960 x 1200	8	61																		
1024 x 768	8	60	70 72 75	85	100	120	140	144	150	170	200	240								
1088 x 612	8	60	70 72 75	85	100	120	140	144	150	170	200	240								
1152 x 864	8	60	70 72 75	85	100	120	140	144	150	170	200									
1280 x 720	8	60	70 72 75	85	100	120	140	144	150	170										
1280 x 768	8	60	70 72 75	85	100	120	140	144	150	170										
1280 x 800	8	60	70 72 75	85	100	120	140	144	150	170										
1280 x 960	8	60	70 72 75	85	100	120	140	144	150	170										
1280 x 1024	8	60	70 72 75	85	100	120	140	144	150	170										
1360 x 768	8	60	70 72 75	85	100	120	140	144	150	170										
1600 x 900	8	60	70 72 75	85	100	120	140	144	150											
1600 x 1024	8	60	70 72 75	85	100	120														
1600 x 1200	8	60	70 72 75	85	100	120														

1920 x 1080	8	30i	60	70	72	75	85	100
1920 x 1200	8		60	70	72	75	85	100
1920 x 1440	8		60	70	72	75	85	
2048 x 1536	8		60	70	72	75	85	

---

320 x 200	16		60	70	72	75		
320 x 240	16		60	70	72	75		
400 x 300	16		60	70	72	75		
480 x 360	16		60	70	72	75		
512 x 384	16		60	70	72	75		
640 x 400	16		60	70	72	75		
640 x 480	16		60	70	72	75	85	100 120 140 144 150 170 200 240
720 x 480	16		60					
720 x 576	16		60					
800 x 600	16		60	70	72	75	85	100 120 140 144 150 170 200 240
848 x 480	16		60	70	72	75	85	100 120 140 144 150 170 200 240
960 x 600	16		60	70	72	75	85	100 120 140 144 150 170 200 240
960 x 1200	16		61					
1024 x 768	16		60	70	72	75	85	100 120 140 144 150 170 200 240
1088 x 612	16		60	70	72	75	85	100 120 140 144 150 170 200 240
1152 x 864	16		60	70	72	75	85	100 120 140 144 150 170 200
1280 x 720	16		60	70	72	75	85	100 120 140 144 150 170
1280 x 768	16		60	70	72	75	85	100 120 140 144 150 170
1280 x 800	16		60	70	72	75	85	100 120 140 144 150 170
1280 x 960	16		60	70	72	75	85	100 120 140 144 150 170
1280 x 1024	16		60	70	72	75	85	100 120 140 144 150 170
1360 x 768	16		60	70	72	75	85	100 120 140 144 150 170
1600 x 900	16		60	70	72	75	85	100 120 140 144 150
1600 x 1024	16		60	70	72	75	85	100 120
1600 x 1200	16		60	70	72	75	85	100 120
1920 x 1080	16	30i	60	70	72	75	85	100
1920 x 1200	16		60	70	72	75	85	100
1920 x 1440	16		60	70	72	75	85	
2048 x 1536	16		60	70	72	75	85	

---

320 x 200	32		60	70	72	75		
320 x 240	32		60	70	72	75		
400 x 300	32		60	70	72	75		
480 x 360	32		60	70	72	75		

512 x 384	32	60	70 72 75
640 x 400	32	60	70 72 75
640 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240
720 x 480	32	60	
720 x 576	32	60	
800 x 600	32	60	70 72 75 85 100 120 140 144 150 170 200 240
848 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 600	32	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	32	61	
1024 x 768	32	60	70 72 75 85 100 120 140 144 150 170 200
1088 x 612	32	60	70 72 75 85 100 120 140 144 150 170 200
1152 x 864	32	60	70 72 75 85 100 120 140 144 150 170
1280 x 720	32	60	70 72 75 85 100 120 140 144 150
1280 x 768	32	60	70 72 75 85 100 120 140 144 150
1280 x 800	32	60	70 72 75 85 100 120 140 144 150
1280 x 960	32	60	70 72 75 85 100 120 140 144 150
1280 x 1024	32	60	70 72 75 85 100 120 140 144 150
1360 x 768	32	60	70 72 75 85 100 120 140 144 150
1600 x 900	32	60	70 72 75 85 100 120
1600 x 1024	32	60	70 72 75 85 100
1600 x 1200	32	60	70 72 75 85 100
1920 x 1080	32	30i 60	70 72 75 85
1920 x 1200	32	60	70 72 75 85
1920 x 1440	32	60	70 72 75 85
2048 x 1536	32	60	70 72 75 85

### Horizontal Spanning Modes

1280 x 480	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 1200	8	61	
2048 x 768	8	60	70 72 75 85 100 120 140 144 150 170 200 240
2176 x 612	8	60	70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	8	60	70 72 75 85 100 120 140 144 150 170 200
2560 x 720	8	60	70 72 75 85 100 120 140 144 150 170
2560 x 768	8	60	70 72 75 85 100 120 140 144 150 170
2560 x 800	8	60	70 72 75 85 100 120 140 144 150 170

2560 x 960	8	60	70 72 75 85 100 120 140 144 150 170
2560 x 1024	8	60	70 72 75 85 100 120 140 144 150 170
2720 x 768	8	60	70 72 75 85 100 120 140 144 150 170
3200 x 900	8	60	70 72 75 85 100 120 140 144 150
3200 x 1024	8	60	70 72 75 85 100 120
3200 x 1200	8	60	70 72 75 85 100 120
3840 x 1080	8	30i 60	70 72 75 85 100
3840 x 1200	8	60	70 72 75 85 100
3840 x 1440	8	60	70 72 75 85
4096 x 1536	8	60	70 72 75 85

---

1280 x 480	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 1200	16	61	
2048 x 768	16	60	70 72 75 85 100 120 140 144 150 170 200 240
2176 x 612	16	60	70 72 75 85 100 120 140 144 150 170 200 240
2304 x 864	16	60	70 72 75 85 100 120 140 144 150 170 200
2560 x 720	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 768	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 800	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 960	16	60	70 72 75 85 100 120 140 144 150 170
2560 x 1024	16	60	70 72 75 85 100 120 140 144 150 170
2720 x 768	16	60	70 72 75 85 100 120 140 144 150 170
3200 x 900	16	60	70 72 75 85 100 120 140 144 150
3200 x 1024	16	60	70 72 75 85 100 120
3200 x 1200	16	60	70 72 75 85 100 120
3840 x 1080	16	30i 60	70 72 75 85 100
3840 x 1200	16	60	70 72 75 85 100
3840 x 1440	16	60	70 72 75 85
4096 x 1536	16	60	70 72 75 85

---

1280 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240
1600 x 600	32	60	70 72 75 85 100 120 140 144 150 170 200 240
1696 x 480	32	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 600	32	60	70 72 75 85 100 120 140 144 150 170 200 240
1920 x 1200	32	61	
2048 x 768	32	60	70 72 75 85 100 120 140 144 150 170 200

2176 x 612	32	60	70 72 75 85 100 120 140 144 150 170 200
2304 x 864	32	60	70 72 75 85 100 120 140 144 150 170
2560 x 720	32	60	70 72 75 85 100 120 140 144 150
2560 x 768	32	60	70 72 75 85 100 120 140 144 150
2560 x 800	32	60	70 72 75 85 100 120 140 144 150
2560 x 960	32	60	70 72 75 85 100 120 140 144 150
2560 x 1024	32	60	70 72 75 85 100 120 140 144 150
2720 x 768	32	60	70 72 75 85 100 120 140 144 150
3200 x 900	32	60	70 72 75 85 100 120
3200 x 1024	32	60	70 72 75 85 100
3200 x 1200	32	60	70 72 75 85 100
3840 x 1080	32	30i 60	70 72 75 85
3840 x 1200	32	60	70 72 75 85
3840 x 1440	32	60	70 72 75 85
4096 x 1536	32	60	70 72 75 85

### Vertical Spanning Modes

640 x 960	8	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	8	60	70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	8	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1088 x 1224	8	60	70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	8	60	70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 1536	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 1600	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 1920	8	60	70 72 75 85 100 120 140 144 150 170
1280 x 2048	8	60	70 72 75 85 100 120 140 144 150 170
1360 x 1536	8	60	70 72 75 85 100 120 140 144 150 170
1600 x 1800	8	60	70 72 75 85 100 120 140 144 150
1600 x 2048	8	60	70 72 75 85 100 120
1600 x 2400	8	60	70 72 75 85 100 120
1920 x 2160	8	30i 60	70 72 75 85 100
1920 x 2400	8	60	70 72 75 85 100
1920 x 2880	8	60	70 72 75 85
2048 x 3072	8	60	70 72 75 85

-----



640 x 960	16	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	16	60	70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	16	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1088 x 1224	16	60	70 72 75 85 100 120 140 144 150 170 200 240
1152 x 1728	16	60	70 72 75 85 100 120 140 144 150 170 200
1280 x 1440	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1536	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1600	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 1920	16	60	70 72 75 85 100 120 140 144 150 170
1280 x 2048	16	60	70 72 75 85 100 120 140 144 150 170
1360 x 1536	16	60	70 72 75 85 100 120 140 144 150 170
1600 x 1800	16	60	70 72 75 85 100 120 140 144 150
1600 x 2048	16	60	70 72 75 85 100 120
1600 x 2400	16	60	70 72 75 85 100 120
1920 x 2160	16	30i 60	70 72 75 85 100
1920 x 2400	16	60	70 72 75 85 100
1920 x 2880	16	60	70 72 75 85
2048 x 3072	16	60	70 72 75 85

---

640 x 960	32	60	70 72 75 85 100 120 140 144 150 170 200 240
800 x 1200	32	60	70 72 75 85 100 120 140 144 150 170 200 240
848 x 960	32	60	70 72 75 85 100 120 140 144 150 170 200 240
960 x 1200	32	60	70 72 75 85 100 120 140 144 150 170 200 240
1024 x 1536	32	60	70 72 75 85 100 120 140 144 150 170 200
1088 x 1224	32	60	70 72 75 85 100 120 140 144 150 170 200
1152 x 1728	32	60	70 72 75 85 100 120 140 144 150 170
1280 x 1440	32	60	70 72 75 85 100 120 140 144 150
1280 x 1536	32	60	70 72 75 85 100 120 140 144 150
1280 x 1600	32	60	70 72 75 85 100 120 140 144 150
1280 x 1920	32	60	70 72 75 85 100 120 140 144 150
1280 x 2048	32	60	70 72 75 85 100 120 140 144 150
1360 x 1536	32	60	70 72 75 85 100 120 140 144 150
1600 x 1800	32	60	70 72 75 85 100 120
1600 x 2048	32	60	70 72 75 85 100
1600 x 2400	32	60	70 72 75 85 100
1920 x 2160	32	30i 60	70 72 75 85
1920 x 2400	32	60	70 72 75 85

```

1920 x 2880 32      60    70 72 75 85
2048 x 3072 32      60    70 72 75 85

```

## TNT2 and Vanta Products

---

```

320 x 200 8        60 70 72 75
320 x 240 8        60 70 72 75
400 x 300 8        60 70 72 75
480 x 360 8        60 70 72 75
512 x 384 8        60 70 72 75
640 x 400 8        60 70 72 75
640 x 480 8        60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480 8        60
720 x 576 8        60
800 x 600 8        60 70 72 75 85 100 120 140 144      170 200 240
1024 x 768 8       60 70 72 75 85 100 120 140 144 150 170 200
1152 x 864 8       60 70 72 75 85 100 120 140 144 150 170
1280 x 720 8       60 70 72 75 85 100 120 140 144 150
1280 x 768 8       60 70 72 75 85 100 120 140 144 150
1280 x 960 8       60 70 72 75 85 100 120 140 144 150
1280 x 1024 8      60 70 72 75 85 100 120 140 144 150
1600 x 900 8       60 70 72 75 85 100 120
1600 x 1024 8      60 70 72 75 85 100
1600 x 1200 8      60 70 72 75 85 100
1920 x 1080 8      30i 60 70 72 75 85 100
1920 x 1200 8      60 70 72 75 85
1920 x 1440 8      60 70 72 75
2048 x 1536 8      60

```

---

```

320 x 200 16       60 70 72 75
320 x 240 16       60 70 72 75
400 x 300 16       60 70 72 75
480 x 360 16       60 70 72 75
512 x 384 16       60 70 72 75
640 x 400 16       60 70 72 75
640 x 480 16       60 70 72 75 85 100 120 140 144 150 170 200 240
720 x 480 16       60
720 x 576 16       60

```

800 x 600	16		60 70 72 75 85 100 120 140 144	170 200 240
1024 x 768	16		60 70 72 75 85 100 120 140 144 150	170 200
1152 x 864	16		60 70 72 75 85 100 120 140 144 150	170
1280 x 720	16		60 70 72 75 85 100 120 140 144	150
1280 x 768	16		60 70 72 75 85 100 120 140 144	150
1280 x 960	16		60 70 72 75 85 100 120 140 144	150
1280 x 1024	16		60 70 72 75 85 100 120 140 144	150
1600 x 900	16		60 70 72 75 85 100 120	
1600 x 1024	16		60 70 72 75 85 100	
1600 x 1200	16		60 70 72 75 85 100	
1920 x 1080	16	30i	60 70 72 75 85 100	
1920 x 1200	16		60 70 72 75 85	
1920 x 1440	16		60 70 72 75	
2048 x 1536	16		60	

---

320 x 200	32		60 70 72 75	
320 x 240	32		60 70 72 75	
400 x 300	32		60 70 72 75	
480 x 360	32		60 70 72 75	
512 x 384	32		60 70 72 75	
640 x 400	32		60 70 72 75	
640 x 480	32		60 70 72 75 85 100 120 140 144 150	170 200 240
720 x 480	32		60	
720 x 576	32		60	
800 x 600	32		60 70 72 75 85 100 120 140 144	170 200 240
1024 x 768	32		60 70 72 75 85 100 120 140 144 150	170
1152 x 864	32		60 70 72 75 85 100 120 140	150
1280 x 720	32		60 70 72 75 85 100 120	
1280 x 768	32		60 70 72 75 85 100 120	
1280 x 960	32		60 70 72 75 85 100 120	
1280 x 1024	32		60 70 72 75 85 100 120	
1600 x 900	32		60 70 72 75 85	
1600 x 1024	32		60 70 72 75 85	
1600 x 1200	32		60 70 72 75 85	
1920 x 1080	32	30i	60 70 72 75	
1920 x 1200	32		60 70	
1920 x 1440	32		60	

## Modes Supported by DACs and TV Encoders

This section lists the supported modes and formats for the following:

- “External DAC Mode Support” on page 94
- “TV-Out Mode Support” on page 95

### External DAC Mode Support

#### Fairchild FMS3815 Modes Supported

Table A.3 shows the refresh rates for various resolutions of the Fairchild FMS3815 external DAC, which is commonly used on GeForce2 MX and Quadro2 MXR boards to drive a secondary CRT.

**Table A.3** External DAC Modes (Fairchild FMS3815)

Resolution	Supported Rates (Hz)
640x480	60, 70, 72, 75, 85, 100, 120, 140, 144, 150, 170
800x600	60, 70, 72, 75, 85, 100, 120, 140, 144, 150, 170
1024x768	60, 70, 72, 75, 85, 100, 120
1152x864	60, 70, 72, 75, 85
1280x720	60, 70, 72, 75, 85, 100
1280x960	60, 70, 72, 75
1280x1024	60, 70, 72, 75
1360x768	60, 70, 72, 75, 85
1600x900	60, 70
1600x1200	—

#### Analog Devices ADV-7123 Modes Supported

Table A.4 shows the refresh rates for various resolutions of the Analog Devices ADV-7123 external DAC, which is commonly used on the GeForce2 MX and the Quadro2 MXR boards to drive a secondary CRT.

**Table A.4** External DAC Modes (Analog Devices ADV-7123)

Resolution	Supported Rates (Hz)
640x480	60, 70, 72, 75, 85, 100, 120, 140, 144, 150, 170
800x600	60, 70, 72, 75, 85, 100, 120, 140, 144, 150, 170
1024x768	60, 70, 72, 75, 85, 100, 120
1152x864	60, 70, 72, 75, 85, 100
1280x720	60, 70, 72, 75, 85, 100
1280x960	60, 70, 72, 75, 85, 90

**Table A.4** External DAC Modes (Analog Devices ADV-7123) (continued)

Resolution	Supported Rates (Hz)
1280x1024	60, 70, 72, 75, 85
1360x768	60, 70, 72, 75, 85, 100
1600x900	60, 70, 75
1600x1200	—

## TV-Out Mode Support

Table A.5 and Table A.6 list the NTSC, PAL, and HDTV TV-Out modes supported by the NVIDIA driver.

**Table A.5** Mode Support for S-Video and Composite Out

Resolution	Bit depth	Comments
320x200	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
320x240	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
640x400	8, 16, 32	DirectDraw mode; not selectable as a Windows desktop
640x480	8, 16, 32	
720x480	8, 16, 32	Overscans (for video)
720x576	8, 16, 32	Overscans (for video)
800x600	8, 16, 32	
1024x768	8, 16, 32	Conexant 25871 only

**Table A.6** Mode Support for Component YPrPb Out and DVI Out

Resolution	Comments
480i (SDTV)	Supported on graphics boards with Conexant 875 or Philips 7108 TV encoders and compatible connectors, and compatible GeForce 6 series GPUs.
480p (EDTV)	
720p (HDTV)	
1080i (HDTV)	
576i (PAL)	
576p (PAL)	

The driver supports manual overscan correction for component and DVI outputs. See the *ForceWare Graphics Driver User's Guide* for instructions on how to use the overscan correction features in the control panel.